

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 899 278 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
10.11.1999 Bulletin 1999/45

(51) Int Cl.⁶: **C08F 10/02**

(43) Date of publication A2:
03.03.1999 Bulletin 1999/09

(21) Application number: **98203673.3**

(22) Date of filing: **15.10.1992**

(84) Designated Contracting States:
BE DE ES FR GB IT NL SE

(30) Priority: **15.10.1991 US 776130**
02.09.1992 US 939281

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97200460.0 / 0 783 006
92922757.7 / 0 608 369

(71) Applicant: **THE DOW CHEMICAL COMPANY**
Midland, Michigan 48640 (US)

(72) Inventors:

- **Lai, Shih-Yaw**
Sugar Land, Texas 77479 (US)
- **Knight, George W.**
Edmond, OK 73034 (US)
- **Wilson, John R.**
Baton Rouge, LA 70810 (US)
- **Stevens, James C.**
Richmond, TX 77469 (US)

(74) Representative:

Smulders, Theodorus A.H.J., Ir. et al
Vereenigde Octrooibureaux
Nieuwe Parklaan 97
2587 BN 's-Gravenhage (NL)

(54) **Process for the preparation of ethylene polymers**

(57) The present invention relates to an ethylene homo- or interpolymer, comprised of ethylene and option-

ally one C₃-C₂₀ α -olefins characterized in that the polymer has 0.01 to 3 long chain branches per 1000 carbons.

EP 0 899 278 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 20 3673

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.8)	
X	EP 0 129 313 A (EXXON RESEARCH ENGINEERING CO) 27 December 1984 (1984-12-27) * claims *	1-8	C08F10/02 C08F4/605	
X	EP 0 273 655 A (EXXON CHEMICAL PATENTS INC) 6 July 1988 (1988-07-06) * claims *	1-8		
A	EP 0 420 436 A (EXXON CHEMICAL PATENTS INC) 3 April 1991 (1991-04-03) * claims; examples *	1		
D,A	& US 5 026 798 A (CANICH, J.) 25 June 1991 (1991-06-25)	1		
D,A	& US 5 055 438 A (CANICH, J.) 8 October 1991 (1991-10-08) * claims *	1		
D,A	EP 0 416 815 A (DOW CHEMICAL CO) 13 March 1991 (1991-03-13) * the whole document *	1		
A	WO 90 03414 A (EXXON CHEMICAL PATENTS INC) 5 April 1990 (1990-04-05) * claims *	1-8		TECHNICAL FIELDS SEARCHED (Int.Cl.8)
P,A	EP 0 495 099 A (MITSUI PETROCHEMICAL IND) 22 July 1992 (1992-07-22) * claims *	1-8		C08F
A	& WO 90 07526 A (MITSUI PETROCHEMICAL IND) 12 July 1990 (1990-07-12) -----	1-8		
The present search report has been drawn up for all claims				
Place of search THE HAGUE		Date of completion of the search 22 September 1999	Examiner KAUMANN, E	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document				

EPO FORM 1503 02.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 3673

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0129313 A	27-12-1984	US 4500648 A	19-02-1985
		AU 2720184 A	01-11-1984
		CA 1225096 A	04-08-1987
		JP 60090203 A	21-05-1985
		US 4581467 A	08-04-1986
		US 4851489 A	25-07-1989
EP 0273655 A	06-07-1988	AT 77395 T	15-07-1992
		AU 612615 B	18-07-1991
		AU 1085288 A	15-07-1988
		DE 3779892 A	23-07-1992
		DK 466388 A	19-10-1988
		FI 883824 A	18-08-1988
		IN 172282 A	29-05-1993
		JP 2796820 B	10-09-1998
		JP 1501555 T	01-06-1989
		KR 9508722 B	04-08-1995
		NZ 222849 A	26-07-1990
		PT 86410 A,B	01-01-1988
		WO 8804673 A	30-06-1988
		YU 230687 A	31-12-1988
EP 0420436 A	03-04-1991	US 5055438 A	08-10-1991
		AT 141275 T	15-08-1996
		AT 151429 T	15-04-1997
		AU 6248390 A	21-03-1991
		AU 643237 B	11-11-1993
		AU 6443990 A	18-04-1991
		CA 2024899 A	14-03-1991
		CA 2065745 A	14-03-1991
		DE 69028057 D	19-09-1996
		DE 69030442 D	15-05-1997
		DE 420436 T	15-02-1996
		DE 662484 T	27-06-1996
		DK 420436 T	02-12-1996
		DK 491842 T	27-10-1997
		EP 0491842 A	01-07-1992
		EP 0662484 A	12-07-1995
		EP 0671404 A	13-09-1995
		EP 0643066 A	15-03-1995
		ES 2091801 T	16-11-1996
		ES 2079332 T	16-01-1996
		GR 3021539 T	28-02-1997
		HU 214667 B	28-04-1998
		JP 3188092 A	16-08-1991
		NO 178891 B	18-03-1996

EPO FORM P4459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 98 20 3673

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0420436 A		NO 178895 B	18-03-1996
		NO 953466 A	14-03-1991
		PT 95272 A	22-05-1991
		RU 2067981 C	20-10-1996
		WO 9104257 A	04-04-1991
		US 5631391 A	20-05-1997
		US 5621126 A	15-04-1997
		US 5420217 A	30-05-1995
		US 5547675 A	20-08-1996
		US 5504169 A	02-04-1996
		US 5723560 A	03-03-1991
		US 5026798 A	25-06-1991
		US 5057475 A	15-10-1991
		US 5168111 A	01-12-1992
		US 5227440 A	13-07-1993
		US 5264405 A	23-11-1993
		PL 166685 B	30-06-1995
		PL 166690 B	30-06-1995
		US 5096867 A	17-03-1992
EP 0416815 A	13-03-1991	AT 156827 T	15-08-1997
		AU 645519 B	20-01-1994
		AU 6203990 A	07-03-1991
		CA 2024333 A	01-03-1991
		DE 69031255 D	18-09-1997
		DE 69031255 T	05-03-1998
		DE 774468 T	02-06-1999
		EP 0764653 A	26-03-1997
		EP 0764664 A	26-03-1997
		EP 0764654 A	26-03-1997
		EP 0774468 A	21-05-1997
		EP 0765888 A	02-04-1997
		ES 2106020 T	01-11-1997
		HK 1001918 A	17-07-1998
		HU 209316 B	28-04-1994
		JP 2684154 B	03-12-1997
		JP 7053618 A	28-02-1995
		JP 2623070 B	25-06-1997
		JP 7070223 A	14-03-1995
		JP 2535249 B	18-09-1996
		JP 3163088 A	15-07-1991
		NO 176964 B	20-03-1995
		NO 179043 B	15-04-1996
		NO 301376 B	20-10-1997
		NO 954469 A	01-03-1991
		RU 2073018 C	10-02-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 3673

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-09-1999


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0416815 A		US 5703187 A	30-12-1997
		CN 1049849 A,B	13-03-1991
		US 5872201 A	16-02-1999
		PL 166689 B	30-06-1995

WO 9003414 A	05-04-1990	AT 154060 T	15-06-1997
		AU 615804 B	10-10-1991
		AU 4338089 A	18-04-1990
		CA 1338883 A	28-01-1997
		DE 68928100 D	10-07-1997
		DE 68928100 T	06-11-1997
		DK 132290 A	27-07-1990
		EP 0389611 A	03-10-1990
		JP 2857438 B	17-02-1999
		JP 3502710 T	20-06-1991
		KR 122879 B	12-11-1997
		PT 91874 A	30-04-1990
		US 5382630 A	17-01-1995
		US 5382631 A	17-01-1995
		YU 190289 A	30-04-1991

EP 0495099 A	22-07-1992	JP 2173014 A	04-07-1990
		JP 2685261 B	03-12-1997
		JP 2173016 A	04-07-1990
		JP 2685262 B	03-12-1997
		JP 2173015 A	04-07-1990
		JP 2685263 B	03-12-1997
		DE 68928696 D	09-07-1998
		DE 68928696 T	03-12-1998
		US 5916988 A	29-06-1999
		AT 166890 T	15-06-1998
		CA 2008315 A,C	24-07-1990
		DE 68929006 D	01-07-1999
		EP 0685498 A	06-12-1995
		EP 0685496 A	06-12-1995
		ES 2118718 T	01-10-1998
		WO 9007526 A	12-07-1990
		JP 2276807 A	13-11-1990
		JP 2571280 B	16-01-1997
		US 5525689 A	11-06-1996
		US 5714426 A	03-02-1998
		US 5639842 A	17-06-1997
		US 5218071 A	08-06-1993
		US 5336746 A	09-08-1994
		EP 0769505 A	23-04-1997

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 899 278 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.03.1999 Bulletin 1999/09

(51) Int Cl.⁶: **C08F 10/02**

(21) Application number: **98203673.3**

(22) Date of filing: **15.10.1992**

(84) Designated Contracting States:
BE DE ES FR GB IT NL SE

(30) Priority: **15.10.1991 US 776130**
02.09.1992 US 939281

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97200460.0 / 0 783 006
92922757.7 / 0 608 369

(71) Applicant: **THE DOW CHEMICAL COMPANY**
Midland, Michigan 48640 (US)

(72) Inventors:
• **Lai, Shih-Yaw**
Sugar Land, Texas 77479 (US)

- **Knight, Georges W.**
Lake Jackson, Texas 77566 (US)
- **Wilson, John R.**
Richwood, Texas 77531 (US)
- **Stevens, James C.**
Midland, Michigan 48642 (US)

(74) Representative:
Smulders, Theodorus A.H.J., Jr. et al
Vereenigde Octrooibureaux
Nieuwe Parklaan 97
2587 BN 's-Gravenhage (NL)

Remarks:

This application was filed on 30 - 10 - 1998 as a
divisional application to the application mentioned
under INID code 62.

(54) **Process for the preparation of ethylene polymers**

(57) The present invention relates to an ethylene ho-
mo- or interpolymer, comprised of ethylene and option-

ally one C₃-C₂₀ α -olefins characterized in that the poly-
mer has 0.01 to 3 long chain branches per 1000 car-
bons.

EP 0 899 278 A2

Description

[0001] This is a divisional of EP-A-0 783 006, the contents thereof being incorporated in the present application by reference, which is a divisional of EP-A-0 608 369, the contents thereof being incorporated in the present application by reference, as well.

[0002] The present invention relates to α -olefin polymers and especially to ethylene polymers, and more in particular to ethylene homopolymers, ethylene copolymers and ethylene interpolymers.

[0003] Molecular weight distribution (MWD), or polydispersity, is a well known variable in polymers. The molecular weight distribution, sometimes described as the ratio of weight average molecular weight (M_w) to number average molecular weight (M_n) (i.e., M_w/M_n) can be measured directly, e.g., by gel permeation chromatography techniques, or more routinely, by measuring I_{10}/I_2 ratio, as described in ASTM D-1238. For linear polyolefins, especially linear polyethylene, it is well known that as M_w/M_n increases, I_{10}/I_2 also increases.

[0004] John Dealy in "Melt Rheology and Its Role in Plastics Processing" (Van Nostrand Reinhold, 1990) page 597 discloses that ASTM D-1238 is employed with different loads in order to obtain an estimate of the shear rate dependence of melt viscosity, which is sensitive to weight average molecular weight (M_w) and number average molecular weight (M_n).

[0005] Bersted in Journal of Applied Polymer Science Vol. 19, page 2167-2177 (1975) theorized the relationship between molecular weight distribution and steady shear melt viscosity for linear polymer systems. He also showed that the broader MWD material exhibits a higher shear rate or shear stress dependency.

[0006] Ramamurthy in Journal of Rheology, 30(2), 337-357 (1986), and Moynihan, Baird and Ramanathan in Journal of Non-Newtonian Fluid Mechanics, 36, 255-263 (1990), both disclose that the onset of sharkskin (i.e., melt fracture) for linear low density polyethylene (LLDPE) occurs at an apparent shear stress of $10\text{--}14\text{ N/cm}^2$ ($1\text{--}1.4 \times 10^6\text{ dyne/cm}^2$), which was observed to be coincident with the change in slope of the flow curve. Ramamurthy also discloses that the onset of surface melt fracture or of gross melt fracture for high pressure low density polyethylene (HP-LDPE) occurs at an apparent shear stress of about 0.13 MPa ($1.3 \times 10^6\text{ dynes/cm}^2$).

[0007] Kalika and Denn in Journal of Rheology, 31, 815-834 (1987) confirmed the surface defects or sharkskin phenomena for LLDPE, but the results of their work determined a critical shear stress of 23 N/cm^2 ($2.3 \times 10^6\text{ dyne/cm}^2$), significantly higher than that found by Ramamurthy and Moynihan et al..

[0008] WO-A-90/03414 discloses linear ethylene interpolymer blends with narrow molecular weight distribution and narrow short chain branching distributions (SCBDs). The melt processibility of the interpolymer blends is controlled by blending different molecular weight interpolymers having different narrow molecular weight distributions and different SCBDs.

[0009] Exxon Chemical Company, in the Preprints of Polyolefins VII International Conference, page 45-66, February 24-27, 1991, disclose that the narrow molecular weight distribution (NMWD) resins produced by their EXXPOL™ technology have higher melt viscosity and lower melt strength than conventional Ziegler resins at the same melt index. In a recent publication, Exxon Chemical Company has also taught that NMWD polymers made using a single site catalyst create the potential for melt fracture ("New Specialty Linear Polymers (SLP) For Power Cables," by Monica Hendewerk and Lawrence Spenadel, presented at IEEE meeting in Dallas, Texas, September, 1991). In a similar vein, in "A New Family of Linear Ethylene Polymers Provides Enhanced Sealing Performance" by Dirk G. F. Van der Sanden and Richard W. Halle, (February 1992 Tappi Journal), Exxon Chemical Company has also taught that the molecular weight distribution of a polymer is described by the polymers melt index ratio (i.e., I_{10}/I_2) and that their new narrow molecular weight distribution polymers made using a single site catalyst are "linear backbone resins containing no functional or long chain branches".

[0010] WO-A-90/07526, corresponding to EP-A-0 495 099, discloses ethylene copolymers obtained from a process wherein ethylene and optionally other monomers are contacted with a catalyst system based on hafnocene and zirconocene catalysts. The product polymer is in fact a blend of polymers having a narrow molecular weight distribution with values of from 1.2 to 4 and a melt flow ratio MFR_{10}/MFR_2 of 8 to 50.

[0011] Previously known narrow molecular weight distribution linear polymers disadvantageously possessed low shear sensitivity or low I_{10}/I_2 value, which limits the extrudability of such polymers. Additionally, such polymers possessed low melt elasticity, causing problems in melt fabrication such as film forming processes or blow molding processes (e.g., sustaining a bubble in the blown film process, or sag in the blow molding process etc.). Finally, such resins also experienced melt fracture surface properties at relatively low extrusion rates thereby processing unacceptably.

[0012] In the art, many processes have been described for the preparation of linear olefin polymers.

[0013] The term "linear olefin polymers" used herein means that the olefin polymer does not have long chain branching. That is, the linear olefin polymer has an absence of long chain branching, as for example the traditional linear low density polyethylene polymers or linear high density polyethylene polymers made using Ziegler polymerization processes (e.g., US-A-4,076,698), sometimes called heterogeneous polymers.

[0014] The term "linear olefin polymers" does not refer to high pressure branched polyethylene, ethylene/vinyl acetate

copolymers, or ethylene/vinyl alcohol copolymers which are known to those skilled in the art to have numerous long chain branches.

[0015] The term "linear olefin polymers" also refers to polymers made using uniform branching distribution polymerization processes, sometimes called homogeneous polymers. Such uniformly branched or homogeneous polymers include those made as described in US-A-3,645,992 and those made using so-called single site catalysts in a batch reactor having relatively high olefin concentrations (as described in US-A-5,026,798 or in US-A-5,055,438) or those made using constrained geometry catalysts in a batch reactor also having relatively high olefin concentrations (as described in US-A-5,064,802 or in EP-A-0 416 815).

[0016] The uniformly branched/homogeneous polymers are those polymers in which the comonomer is randomly distributed within a given interpolymer molecule and wherein substantially all of the interpolymer molecules have the same ethylene/comonomer ratio within that interpolymer, but these polymers too have an absence of long chain branching, as, for example, Exxon Chemical has taught in their February 1992 Tappi Journal paper.

[0017] In accordance with the present invention, it has now unexpectedly been found that if constraint geometry catalysts of the type described in the above-mentioned US-A-5,064,802 and in EP-A-0 416 815 are used in a continuous process as opposed to in the prior art batch reactor having relatively high olefin concentration - unique polyolefins and especially polyethylenes having an improved melt elasticity and processability are formed. These polyolefins and polyethylenes are referred to herein as substantially linear polyolefins and polyethylenes.

[0018] In other words, the improved melt elasticity and processability of the substantially linear polymers according to the present invention result, it is believed, from their method of production. The polymers may be produced via a continuous (as opposed to a batch) controlled polymerization process using at least one reactor, but can also be produced using multiple reactors (e.g., using a multiple reactor configuration as described in US-A-3,914,342) at a polymerization temperature and pressure sufficient to produce the ethylene polymers having the desired properties.

[0019] The present invention, hence relates to the provision of ethylene polymers which have unusual properties, including an unusual combination of properties, which leads to enhanced processability of the novel polymers. The substantially linear ethylene polymers have the processability similar to highly branched low density polyethylene (LDPE), but the strength and toughness of linear low density polyethylene (LLDPE). However, the novel substantially linear ethylene polymers are distinctly different from traditional Ziegler polymerized heterogeneous polymers (e.g., LLDPE) and are also different from traditional free radical/high pressure polymerized LDPE. Surprisingly, the novel substantially linear olefin polymers are also different from homogeneous olefin polymers having a uniform branching distribution.

[0020] As will be shown in Example 3, described hereinbelow, a ^{13}C NMR spectrum of the ethylene homopolymer prepared shows peaks which can be assigned to carbons associated with a long chain branch.

[0021] Long chain branching is defined herein as a chain length of at least about 6 carbons, above which the length cannot be distinguished using ^{13}C nuclear magnetic resonance spectroscopy. The long chain branch can be as long as about the same length as the length of the polymer back-bone.

[0022] Long chain branching is determined by using ^{13}C nuclear magnetic resonance (NMR) spectroscopy and is quantified using the method of Randall (Rev. Macromol.Chem. Phys., C29 (2&3), p. 285-297), the disclosure of which is incorporated herein by reference.


[0023] The present invention, hence, relates to elastic substantially linear ethylene homo or interpolymers, having improved processability, e.g., low susceptibility to melt fracture, even under high shear stress conditions. Such substantially linear ethylene polymers have a critical shear rate at the onset of surface melt fracture substantially higher than, and a processing index substantially less than, that of a linear polyethylene at the same molecular weight distribution and melt index.

[0024] More in detail, the present invention relates to ethylene homo- or interpolymer, comprised of ethylene and optionally one $\text{C}_3\text{-C}_{20}$ α -olefins characterized in that the polymer has 0.01 to 3 long chain branches per 1000 carbons. Such polymers are obtainable by a process for the preparation of ethylene homopolymer or ethylene interpolymer, comprising contacting ethylene and optionally one or more $\text{C}_2\text{-C}_{20}$ olefins with a catalyst composition under polymerization conditions, wherein said catalyst composition is:

- a) a metal coordination complex comprising a metal atom of groups 3-10 or the Lanthanide series of the Periodic Table of the Elements and a delocalized π -bonded moiety substituted with a constrain inducing moiety, said complex having a constrained geometry about the metal atom such that the angle at the metal atom between the centroid of the delocalized, substituted π -bonded moiety and the center of at least one remaining substituent is less than such angle in a similar complex containing a similar π -bonded moiety lacking in such constrain-inducing substituent, and provided further that for such complexes comprising more than one delocalized, substituted π -bonded moiety, only one thereof for each metal atom of the complex is a cyclic, delocalized, substituted π -bonded moiety, and
- b) an activating cocatalyst,

characterized in that the process is a continuous process comprising continuously contacting said ethylene and optionally one or more C₂-C₂₀ olefins with said catalyst composition.


[0025] In a preferred embodiment, the metal coordination complex used in the continuous process of the present invention corresponds to the formula:

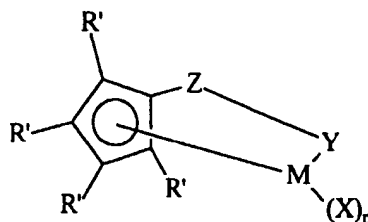

wherein

- R' each occurrence is independently selected from the group consisting of hydrogen, alkyl, aryl, silyl, germyl, cyano, halo and combinations thereof having up to 20 non-hydrogen atoms;
 X each occurrence independently is selected from the group consisting of hydride, halo, alkyl, aryl, silyl, germyl, aryloxy, alkoxy, amide, siloxy, neutral Lewis base ligands and combinations thereof having up to 20 non-hydrogen atoms;
 Y is -O-, -S-, -NR*, -PR*, or a neutral two electron donor ligand selected from the group consisting of OR*, SR*, NR*₂ or PR*₂;
 M is as previously defined; and
 Z is SiR*₂, CR*₂, SiR*₂SiR*₂, CR*₂CR*₂, CR*=CR*, CR*₂SiR*₂, GeR*₂, BR*, BR*₂; wherein
 R* each occurrence is independently selected from the group consisting of hydrogen, alkyl, aryl, silyl, halogenated alkyl, halogenated aryl groups having up to 20 non-hydrogen atoms, and mixtures thereof, or two or more R* groups from Y, Z, or both Y and Z form a fused ring system; and n is 1 or 2.

[0026] In a second preferred embodiment of the continuous process of the present invention, catalyst component a) is an amidosilane- or amidoalkanediy- compound corresponding to the formula:

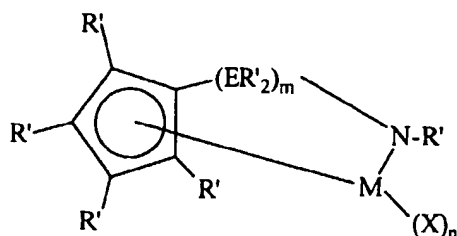

wherein:

- M is titanium, zirconium or hafnium, bound to an η⁵-cyclopentadienyl group;
 R' each occurrence is independently selected from hydrogen, silyl, alkyl, aryl and combinations thereof having up to 10 carbon or silicon atoms;
 E is silicon or carbon;
 X independently each occurrence is hydride, alkyl, or aryl of up to 20 carbons; and
 m is 1 or 2.

[0027] The cocatalyst b) used in the continuous process of the invention preferably is methylaluminoxane or tris (pentafluorophenyl)borane.

[0028] The continuous process of the invention can be a gas phase process, or a suspension process, or a solution

process, or a slurry process.

[0029] In the continuous process the invention ethylene is preferably contacted in combination with at least one C₃₋₂₀ α-olefin with the catalyst composition; and the ethylene polymer generated is recovered.

[0030] The polymerization temperature generally is from about 0°C to about 250°C, while the reaction pressure generally is between atmospheric and 100 MPa.

[0031] The ethylene concentration is generally not more than 6 percent by weight of the reactor contents, preferably not more than 4 percent by weight.

[0032] The polymer concentration is suitably above 5 percent by weight of the reactor contents, preferably above 6 percent by weight.

[0033] In a preferred embodiment of the present invention, ethylene is contacted with 1-propene, 1-butene, 1-hexene, 4-methyl-1-pentene or 1-octene.

[0034] Preferably, the ethylene polymers of the invention are ethylene/α-olefin copolymers. Similar to the traditional homogeneous polymers, the substantially linear ethylene/α-olefin copolymers of the invention have only a single melting point, as opposed to traditional Ziegler polymerized heterogeneous linear ethylene/α-olefin copolymers which have two or more melting points (determined using differential scanning calorimetry (DSC)).

[0035] Ethylene polymers of the present invention comprise substantially linear ethylene polymers, having a polymer backbone substituted with 0.01 long chain branches/1000 carbons to 3 long chain branches/1000 carbons, e.g. with 0.01 long chain branches/1000 carbons to 1 long chain branch/1000 carbons, esp. with 0.05 long chain branches/1000 carbons to 1 long chain branch/1000 carbons.

[0036] Preferably, the ethylene polymers of the invention are substantially linear polymers, having a melt flow ratio, I_{10}/I_2 , and a molecular weight distribution, M_w/M_n , defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63.$$

[0037] More preferred are ethylene homo- or interpolymers of the invention, which have a molecular weight distribution, M_w/M_n , of less than 5, preferentially of between 1.5 and 2.5.

[0038] Preferably, the ethylene polymers of the invention are substantially linear polymers, having:

- a) a melt flow ratio, I_{10}/I_2 , ≥ 5.63 ,
- b) a molecular weight distribution, M_w/M_n , defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63,$$

and

- c) a critical shear stress at onset of gross melt fracture greater than 40 N/cm² (4×10^6 dyne/cm²).

[0039] These polymers can also have:

- a) a melt flow ratio, I_{10}/I_2 , ≥ 5.63 ,
- b) a molecular weight distribution, M_w/M_n , defined by the equation:

$$M_w/M_n \leq (I_{10}/I_2) - 4.63,$$

and

- c) a critical shear rate at onset of surface melt fracture at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having about the same I_2 and M_w/M_n .

[0040] In another aspect, the polymers have:

- a) a melt flow ratio, I_{10}/I_2 , ≥ 5.63 , and
- b) a molecular weight distribution, M_w/M_n , of from 1.5 to 2.5.

[0041] In still another aspect, the polymers have:

- a) a melt flow ratio, I_{10}/I_2 , ≥ 5.63 ,

- b) a molecular weight distribution, M_w/M_n of from 1.5 to 2.5, and
- c) a critical shear rate at onset of surface melt fracture of at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer at about the same l_2 and M_w/M_n .

5 [0042] Further, the substantially linear ethylene polymers can also be characterized as having a critical shear rate at onset of surface melt fracture of at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer at about the same l_2 and M_w/M_n .

[0043] In still another aspect the substantially linear ethylene polymer can be characterized as having:

- 10 (a) from 0.01 to 3 long chain branches/1000 carbons along the polymer backbone and
- (b) a critical shear stress at onset of gross melt fracture of greater than 40 N/cm² (4×10^6 dynes/cm²).

[0044] The substantially linear olefin polymer can also be characterized as having:

- 15 (a) from about 0.01 to about 3 long chain branches/1000 carbons along the polymer backbone and
- (b) a critical shear rate at onset of surface melt fracture of at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer at about the same l_2 and M_w/M_n .

20 [0045] And in still another aspect, the olefin polymer can be characterized as a substantially linear olefin polymer having:

- (a) from 0.01 to 3 long chain branches/1000 carbons along the polymer backbone,
- (b) a melt flow ratio, I_1/I_2 , ≥ 5.63 , and
- (c) a molecular weight distribution, M_w/M_n from 1.5 to 2.5.

25 [0046] The elastic substantially linear olefin polymers also have a processing index (PI) less than or equal to about 70 percent of the PI of a comparative linear olefin polymer at about the same l_2 and M_w/M_n .

[0047] Compositions comprising the substantially linear olefin polymer and at least one other natural or synthetic polymer are also within the scope of the invention.

30 [0048] Elastic substantially linear olefin polymers comprising ethylene homopolymers or an interpolymer of ethylene with at least one C₃-C₂₀ α -olefin copolymers are especially preferred.

[0049] In a third aspect, the present invention is directed to the use of a catalyst composition comprising:

- 35 a) a metal coordination complex comprising a metal atom of groups 3-10 or the Lanthanide series of the Periodic Table of the Elements and a delocalized π -bonded moiety substituted with a constrain inducing moiety, said complex having a constrained geometry about the metal atom such that the angle at the metal atom between the centroid of the delocalized, substituted π -bonded moiety and the center of at least one remaining substituent is less than such angle in a similar complex containing a similar π -bonded moiety lacking in such constrain-inducing substituent, and provided further that for such complexes comprising more than one delocalized, substituted π -bonded moiety,
- 40 only one thereof for each metal atom of the complex is a cyclic, delocalized, substituted π -bonded moiety, and
- b) an activating cocatalyst, as a continuous ethylene homo-, co- or interpolymerization catalyst.

45 [0050] In the present description "melt tension" is measured by a specially designed pulley transducer in conjunction with the melt indexer. Melt tension is the load that the extrudate or filament exerts while passing over the pulley at the standard speed of 30 rpm. The melt tension measurement is similar to the "Melt Tension Tester" made by Toyoseiki and is described by John Dealy in "Rheometers for Molten Plastics", published by Van Nostrand Reinhold Co. (1982) on page 250-251. The melt tension of these new polymers is also surprisingly good, e.g., as high as about 2 grams or more, especially for the substantially linear olefin polymers which have a very narrow molecular weight distribution (i.e., M_w/M_n from 1.5 to 2.5).

50 [0051] The SCBDI (Short Chain Branch Distribution Index) or CDBI (Composition Distribution Branch Index) is defined as the weight percent of the polymer molecules having a comonomer content within 50 percent of the median total molar comonomer content. The CDBI of a polymer is readily calculated from data obtained from techniques known in the art, such as, for example, temperature rising elution fractionation (abbreviated herein as "TREF") as described, for example, in Wild et al, Journal of Polymer Science, Poly. Phys. Ed., Vol. 20, p. 441 (1982), or as described in US-A-4,798,081. The SCBDI or CDBI for the substantially linear ethylene polymers obtainable by the present invention is preferably greater than about 30 percent, especially greater than about 50 percent.

55 [0052] A unique characteristic of the polymers obtainable by the process of the present invention is a highly unexpected flow property where the I_1/I_2 value is essentially independent of polydispersity index (i.e. M_w/M_n). This is con-

trasted with conventional Ziegler polymerized heterogeneous polyethylene resins and with conventional single site catalyst polymerized homogeneous polyethylene resins having rheological properties such that as the polydispersity index increases, the I_{10}/I_2 value also increases.

[0053] The density of the ethylene or ethylene/ α -olefin substantially linear olefin polymers obtainable by the continuous process of the present invention is measured in accordance with ASTM D-792 and is generally from 0.85 g/cm³ to 0.97 g/cm³, preferably from 0.85 g/cm³ to 0.955 g/cm³, and especially from 0.85 g/cm³ to 0.92 g/cm³.

[0054] The molecular weight of the ethylene or ethylene/ α -olefin substantially linear olefin polymers obtainable by the process of the present invention is conveniently indicated using a melt index measurement according to ASTM D-1238, Condition 190°C/2.16 kg (formally known as "Condition (E)" and also known as I_2). Melt index is inversely proportional to the molecular weight of the polymer. Thus, the higher the molecular weight, the lower the melt index, although the relationship is not linear. The melt index for the ethylene or ethylene/ α -olefin substantially linear polymers used herein is generally from 0.01 grams/10 minutes (g/10 min) to 1000 g/10 min, preferably from 0.01 g/10 min to 100 g/10 min, and especially from 0.01 g/10 min to 10 g/10 min.

[0055] Another measurement useful in characterizing the molecular weight of the obtainable polymers is conveniently indicated using a melt index measurement according to ASTM D-1238, Condition 190°C/10 kg (formerly known as "Condition (N)" and also known as I_{10}). The ratio of these two melt index terms is the melt flow ratio and is designated as I_{10}/I_2 . For the substantially linear ethylene/ α -olefin polymers of the invention, the I_{10}/I_2 ratio indicates the degree of long chain branching, i.e., the higher the I_{10}/I_2 ratio, the more long chain branching in the polymer. Generally, the I_{10}/I_2 ratio of the substantially linear ethylene/ α -olefin polymers is at least about 5.63, preferably at least about 7, especially at least about 8 or above.

[0056] Additives such as antioxidants (e.g., hindered phenolics (e.g., Irganox® 1010 made by Ciba Geigy Corp.), phosphites (e.g., Irgafos® 168 made by Ciba Geigy Corp.)), cling additives (e.g., PIB), antiblock additives, pigments, and the like can also be included in the polyethylene compositions, to the extent that they do not interfere with the enhanced properties discovered in accordance with the present invention.

Brief Description of the Drawings

[0057] Figure 1 is a schematic representation of a polymerization process of the present invention.

[0058] Figure 2 plots data describing the relationship between I_{10}/I_2 and M_w/M_n for two examples of the invention, and for some comparative examples.

[0059] Figure 3 plots the shear stress versus shear rate for an example of the invention and for a comparative example, described herein.

[0060] Figure 4 plots the shear stress versus shear rate for an example of the invention and for a comparative example, described herein.

[0061] Figure 5 plots the heat seal strength versus heat seal temperature of film made from examples of the invention, and for comparative examples, described herein.

[0062] Figure 6 graphically displays dynamic shear viscosity data for an elastic substantially linear olefin polymer of the present invention and for a comparative linear polymer made using single site catalyst technology.

[0063] Figure 7 graphically displays I_{10}/I_2 ratio as a function of ethylene concentration in the polymerization reactor for ethylene/propylene substantially linear copolymers of the invention.

Molecular Weight Distribution Determination

[0064] The whole interpolymer product samples and the individual interpolymer samples are analyzed by gel permeation chromatography (GPC) on a Waters 150C high temperature chromatographic unit equipped with three mixed porosity columns (Polymer Laboratories 10³, 10⁴, 10⁵, and 10⁶), operating at a system temperature of 140°C. The solvent is 1,2,4-trichlorobenzene, from which 0.3 percent by weight solutions of the samples are prepared for injection. The flow rate is 1.0 milliliters/minute and the injection size is 200 microliters.

[0065] The molecular weight determination is deduced by using narrow molecular weight distribution polystyrene standards (from Polymer Laboratories) in conjunction with their elution volumes. The equivalent polyethylene molecular weights are determined by using appropriate Mark-Houwink coefficients for polyethylene and polystyrene (as described by Williams and Word in Journal of Polymer Science, Polymer Letters, Vol. 6, (621) 1968) to derive the following equation:

$$M_{\text{polyethylene}} = a * (M_{\text{polystyrene}})^b.$$

[0066] In this equation, $a = 0.4316$ and $b = 1.0$. Weight average molecular weight, M_w , is calculated in the usual

manner according to the following formula: $M_w = \sum w_i \cdot M_i$, where w_i and M_i are the weight fraction and molecular weight, respectively, of the i^{th} fraction eluting from the GPC column.

[0067] The molecular weight distribution (M_w/M_n) for the polymers obtainable by the continuous process of the invention is generally less than 5, preferably from 1.5 to 2.5, and especially from 1.7 to 2.3.

Processing Index Determination

[0068] The rheological processing index (PI) is measured by a gas extrusion rheometer (GER). The GER is described by M. Shida, R.N. Shroff and L.V. Cancio in Polym. Eng. Sci., Vol. 17, no. 11, p. 770 (1977), and in "Rheometers for Molten Plastics" by John Dealy, published by Van Nostrand Reinhold Co. (1982) on page 97-99. The processing index is measured at a temperature of 190°C, at nitrogen pressure of $17.2 \times 10^6 \text{ N/m}^2$ gauge (2500 psig) using a 752 micrometers (0.0296 inch) diameter, 20:1 L/D die having an entrance angle of 180°. The GER processing index is calculated in millipoise units from the following equation:

$$PI = 21.5 \text{ N/cm}^2 (2.15 \times 10^6 \text{ dynes/cm}^2) / (1000 \times \text{shear rate}),$$

where: 21.5 N/cm^2 ($2.15 \times 10^6 \text{ dynes/cm}^2$) is the shear stress at of $17.2 \times 10^6 \text{ N/m}^2$ (2500 psi), and the shear rate is the shear rate at the wall as represented by the following equation:

$32 Q' / (60 \text{ sec/min}) (0.745) (\text{Diameter} \times 2.54 \text{ cm/in})^3$, where:

Q' is the extrusion rate (gms/min),

0.745 is the melt density of polyethylene (gm/cm^3), and

[0069] Diameter is the orifice diameter of the capillary (inches).

The PI is the apparent viscosity of a material measured at apparent shear stress of 21.5 N/cm^2 ($2.15 \times 10^6 \text{ dynes/cm}^2$).

[0070] For the substantially linear ethylene polymers disclosed herein, the PI is less than or equal to 70 percent of that of a comparative linear olefin polymer at about the same I_2 and M_w/M_n .

[0071] An apparent shear stress vs. apparent shear rate plot is used to identify the melt fracture phenomena. According to Ramamurthy in *Journal of Rheology*, 30(2), 337-357, 1986, above a certain critical flow rate, the observed extrudate irregularities may be broadly classified into two main types: surface melt fracture and gross melt fracture.

[0072] Surface melt fracture occurs under apparently steady flow conditions and ranges in detail from loss of specular gloss to the more severe form of "sharkskin". In this disclosure, the onset of surface melt fracture is characterized at the beginning of losing extrudate gloss at which the surface roughness of extrudate can only be detected by 40X magnification. The critical shear rate at onset of surface melt fracture for the substantially linear ethylene polymers is at least 50 percent greater than the critical shear rate at the onset of surface melt fracture of a linear olefin polymer having about the same I_2 and M_w/M_n . Preferably, the critical shear stress at onset of surface melt fracture for the substantially linear ethylene polymers obtainable by the continuous of the invention is greater than 28 N/cm^2 ($2.8 \times 10^6 \text{ dynes/cm}^2$).

[0073] Gross melt fracture occurs at unsteady flow conditions and ranges in detail from regular (alternating rough and smooth, helical, etc.) to random distortions. For commercial acceptability, (e.g., in blown film products), surface defects should be minimal, if not absent. The critical shear rate at onset of surface melt fracture (OSMF) and critical shear stress at onset of gross melt fracture (OGMF) will be used herein based on the changes of surface roughness and configurations of the extrudates extruded by a GER. For the substantially linear olefin polymers of the invention, the critical shear stress at onset of gross melt fracture is preferably greater than 40 N/cm^2 ($4 \times 10^6 \text{ dynes/cm}^2$).


The Constrained Geometry Catalyst

[0074] As said herein-above, suitable constrained geometry catalysts for use in the continuous process to prepare the polymers of the present invention preferably include constrained geometry catalysts as disclosed in EP-A-0 416 815. The monocyclopentadienyl transition metal olefin polymerization catalysts taught in US-A-5,026,798, are also believed to be suitable for use in preparing the polymers of the present invention, so long as the polymerization conditions substantially conform to those.

[0075] The foregoing catalysts may be further described as comprising a metal coordination complex comprising a metal of groups 3-10 or the Lanthanide series of the Periodic Table of the Elements and a delocalized π -bonded moiety substituted with a constrain-inducing moiety, said complex having a constrained geometry about the metal atom such that the angle at the metal between the centroid of the delocalized, substituted π -bonded moiety and the center of at

least one remaining substituent is less than such angle in a similar complex containing a similar π -bonded moiety lacking in such constrain-inducing substituent, and provided further that for such complexes comprising more than one delocalized, substituted π -bonded moiety, only one thereof for each metal atom of the complex is a cyclic, delocalized, substituted π -bonded moiety. The catalyst further comprises an activating cocatalyst.

[0076] Preferred catalyst complexes correspond to the formula:



wherein:

M is a metal of group 3-10, or the Lanthanide series of the Periodic Table of the Elements;

Cp* is a cyclopentadienyl or substituted cyclopentadienyl group bound in an η^5 bonding mode to M;


Z is a moiety comprising boron, or a member of group 14 of the Periodic Table of the Elements, and optionally sulfur or oxygen, said moiety having up to 20 non-hydrogen atoms, and optionally Cp* and Z together form a fused ring system;

X independently each occurrence is an anionic ligand group or neutral Lewis base ligand group having up to 30 non-hydrogen atoms;

n is 0, 1, 2, 3, or 4 and is 2 less than the valence of M; and

Y is an anionic or nonanionic ligand group bonded to Z and M comprising nitrogen, phosphorus, oxygen or sulfur and having up to 20 non-hydrogen atoms, optionally Y and Z together form a fused ring system.

[0077] More preferably still, such complexes correspond to the formula:

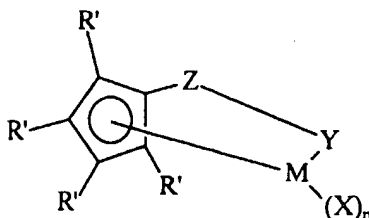

wherein:

R' each occurrence is independently selected from the group consisting of hydrogen, alkyl, aryl, silyl, germlyl, cyano, halo and combinations thereof having up to 20 non-hydrogen atoms;

X each occurrence independently is selected from the group consisting of hydride, halo, alkyl, aryl, silyl, germlyl, aryloxy, alkoxy, amide, siloxy, neutral Lewis base ligands and combinations thereof having up to 20 non-hydrogen atoms;

Y is -O-, -S-, -NR⁺-, -PR⁺-, or a neutral two electron donor ligand selected from the group consisting of OR⁺, SR⁺, NR⁺₂ or PR⁺₂;

M is as previously defined; and

Z is SiR⁺₂, CR⁺₂, SiR⁺₂SiR⁺₂, CR⁺₂CR⁺₂, CR⁺=CR⁺, CR⁺₂SiR⁺₂, GeR⁺₂, BR⁺, BR⁺₂; wherein


R⁺ each occurrence is independently selected from the group consisting of hydrogen, alkyl, aryl, silyl, halogenated alkyl, halogenated aryl groups having up to 20 non-hydrogen atoms, and mixtures thereof, or two or more R⁺ groups from Y, Z, or both Y and Z form a fused ring system; and n is 1 or 2.

[0078] It should be noted that whereas formula I and the following formulas indicate a cyclic structure for the catalysts, when Y is a neutral two electron donor ligand, the bond between M and Y is more accurately referred to as a coordinate-

covalent bond. Also, it should be noted that the complex may exist as a dimer or higher oligomer.

[0079] Further preferably, at least one of R', Z, or R* is an electron donating moiety. Thus, highly preferably Y is a nitrogen or phosphorus containing group corresponding to the formula -N(R'')- or -P(R'')-, wherein R'' is C₁₋₁₀ alkyl or aryl, i.e., an amido or phosphido group.

[0080] Most highly preferred complex compounds are amidosilane- or amidoalkanediy- compounds corresponding to the formula:

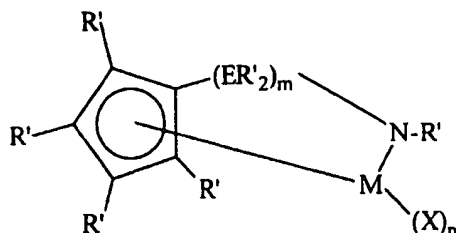

wherein:

M is titanium, zirconium or hafnium, bound in an η^5 bonding mode to the cyclopentadienyl group;

R' each occurrence is independently selected from the group consisting of hydrogen, silyl, alkyl, aryl and combinations thereof having up to 10 carbon or silicon atoms;

E is silicon or carbon;

X independently each occurrence is hydride, halo, alkyl, aryl aryloxy or alkoxy of up to 10 carbons;

m is 1 or 2; and

n is 1 or 2.

[0081] Examples of the above most highly preferred metal coordination compounds include compounds wherein the R' on the amido group is methyl, ethyl, propyl, butyl, pentyl, hexyl, (including isomers), norbornyl, benzyl, phenyl, etc.; the cyclopentadienyl group is cyclopentadienyl, indenyl, tetrahydroindenyl, fluorenyl, octahydrofluorenyl, etc.; R' on the foregoing cyclopentadienyl groups each occurrence is hydrogen, methyl, ethyl, propyl, butyl, pentyl, hexyl, (including isomers), norbornyl, benzyl, phenyl, etc.; and X is chloro, bromo, iodo, methyl, ethyl, propyl, butyl, pentyl, hexyl, (including isomers), norbornyl, benzyl, phenyl, etc.

[0082] Specific compounds include: (tert-butylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyizirconium dichloride, (tert-butylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyiltitanium dichloride, (methylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyizirconium dichloride, (methyl amido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyiltitanium dichloride, (ethylamido) (tetramethyl- η^5 -cyclopentadienyl)-methylenetitanium dichloride, (tertbutylamido)dibenzyl(tetramethyl- η^5 -cyclopentadienyl) silanezirconium dibenzyl, (benzyl amido) dimethyl - (tetramethyl- η^5 -cyclopentadienyl)silanezirconium dichloride, (phenylphosphido) dimethyl(tetramethyl- η^5 -cyclopentadienyl)silanezirconium dibenzyl, (tertbutylamido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silanezirconium dimethyl, and the like.

[0083] The complexes may be prepared by contacting a derivative of a metal, M, and a group I metal derivative or Grignard derivative of the cyclopentadienyl compound in a solvent and separating the salt byproduct. Suitable solvents for use in preparing the metal complexes are aliphatic or aromatic liquids such as cyclohexane, methylcyclohexane, pentane, hexane, heptane, tetrahydrofuran, diethyl ether, benzene, toluene, xylene, ethylbenzene, etc., or mixtures thereof.


[0084] In a preferred embodiment, the metal compound is MX_{n+1} , i.e., M is in a lower oxidation state than in the corresponding compound, MX_{n+2} and the oxidation state of M in the desired final complex. A noninterfering oxidizing agent may thereafter be employed to raise the oxidation state of the metal. The oxidation is accomplished merely by contacting the reactants utilizing solvents and reaction conditions used in the preparation of the complex itself. By the term "noninterfering oxidizing agent" is meant a compound having an oxidation potential sufficient to raise the metal oxidation state without interfering with the desired complex formation or subsequent polymerization processes. A particularly suitable noninterfering oxidizing agent is AgCl or an organic halide such as methylene chloride. The foregoing techniques are disclosed in EP-A-0 416 815 and EP-A-0 514 828.

[0085] Additionally the complexes may be prepared according to the teachings of the copending United States application serial number 778,433 entitled: "Preparation of Metal Coordination Complex (I)", filed in the names of Peter Nickias and David Wilson, on October 15, 1991 and the copending United States application serial number 778,432 entitled:

"Preparation of Metal Coordination Complex (II)", filed in the names of Peter Nickias and David Devore, on October 15, 1991, and the patents issuing therefrom.

[0086] Suitable cocatalysts for use herein include polymeric or oligomeric aluminoxanes, especially methyl aluminoxane, as well as inert, compatible, noncoordinating, ion forming compounds. So-called modified methyl aluminoxane (MMAO) is also suitable for use as a cocatalyst. One technique for preparing such modified aluminoxane is disclosed in US-A-5,041,584. Aluminoxanes can also be made as disclosed in U.S. Patents Nos. 5,542,199; 4,544,762; 5,015,749; and 5,041,585. Preferred cocatalysts are inert, noncoordinating, boron compounds.

[0087] Ionic active catalyst species which can be used to polymerize the polymers described herein correspond to the formula:

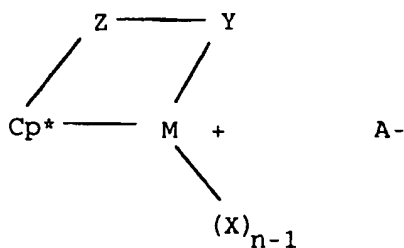

wherein:

M is a metal of group 3-10, or the Lanthanide-series of the Periodic Table of the Elements;

Cp* is a cyclopentadienyl or substituted cyclopentadienyl group bound in an η^5 bonding mode to M;

Z is a moiety comprising boron, or a member of group 14 of the Periodic Table of the Elements, and optionally sulfur or oxygen, said moiety having up to 20 non-hydrogen atoms, and optionally Cp* and Z together form a fused ring system;

X independently each occurrence is an anionic ligand group or neutral Lewis base ligand group having up to 30 non-hydrogen atoms;

n is 0, 1, 2, 3, or 4 and is 2 less than the valence of M; and

A- is a noncoordinating, compatible anion.

[0088] One method of making the ionic catalyst species which can be utilized to make the polymers of the present invention involve combining:

a) at least one first component which is a mono(cyclopentadienyl) derivative of a metal of Group 3-10 or the Lanthanide Series of the Periodic Table of the Elements containing at least one substituent which will combine with the cation of a second component (described hereinafter) which first component is capable of forming a cation formally having a coordination number that is one less than its valence, and

b) at least one second component which is a salt of a Bronsted acid and a noncoordinating, compatible anion.

[0089] More particularly, the non-coordinating, compatible anion of the Bronsted acid salt may comprise a single coordination complex comprising a charge-bearing metal or metalloid core, which anion is both bulky and non-nucleophilic. The recitation "metalloid", as used herein, includes non-metals such as boron, phosphorus and the like which exhibit semi-metallic characteristics.


[0090] Illustrative, but not limiting examples of monocyclopentadienyl metal components (first components) which may be used in the preparation of cationic complexes are derivatives of titanium, zirconium, vanadium, hafnium, chromium, lanthanum, etc. Preferred components are titanium or zirconium compounds. Examples of suitable monocyclopentadienyl metal compounds are hydrocarbyl-substituted monocyclopentadienyl metal compounds such as (tert-butylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediylzirconium dimethyl, (tert-butylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyltitanium dimethyl, (methylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediylzirconium dibenzyl, (methylamido) (tetramethyl- η^5 -cyclopentadienyl)-1,2-ethanediyltitanium dimethyl, (ethylamido) (tetramethyl- η^5 -cyclopentadienyl) methylenetitanium dimethyl, (tertbutylamido) dibenzyl (tetramethyl- η^5 -cyclopentadienyl) silanetzirconium dibenzyl, (benzylamido)dimethyl-(tetramethyl- η^5 -cyclopentadienyl) silanetitanium diphenyl, (phenylphosphido)dimethyl(tetramethyl- η^5 -cyclopentadienyl)silanetzirconium dibenzyl, and the like.

[0091] Such components are readily prepared by combining the corresponding metal chloride with a dilithium salt of the substituted cyclopentadienyl group such as a cyclopentadienylalkanedyl, cyclopentadienyl-silane amide, or cyclopentadienyl-phosphide compound. The reaction is conducted in an inert liquid such as tetrahydrofuran, C₆₋₁₀ alkanes, toluene, etc. utilizing conventional synthetic procedures. Additionally, the first components may be prepared by reaction of a group II derivative of the cyclopentadienyl compound in a solvent and separating the salt by-product. Magnesium derivatives of the cyclopentadienyl compounds are preferred. The reaction may be conducted in an inert solvent such as cyclohexane, pentane, tetrahydrofuran, diethyl ether, benzene, toluene, or mixtures of the like. The resulting metal cyclopentadienyl halide complexes may be alkylated using a variety of techniques. Generally, the metal cyclopentadienyl alkyl or aryl complexes may be prepared by alkylation of the metal cyclopentadienyl halide complexes with alkyl or aryl derivatives of group I or group II metals. Preferred alkylating agents are alkyl lithium and Grignard derivatives using conventional synthetic techniques. The reaction may be conducted in an inert solvent such as cyclohexane, pentane, tetrahydrofuran, diethyl ether, benzene, toluene, or mixtures of the like.

[0092] A preferred solvent is a mixture of toluene and tetrahydrofuran.

[0093] Compounds useful as a second component in the preparation of the ionic catalysts useful in this invention will comprise a cation, which is a Bronsted acid capable of donating a proton, and a compatible noncoordinating anion. Preferred anions are those containing a single coordination complex comprising a charge-bearing metal or metalloid core which anion is relatively large (bulky), capable of stabilizing the active catalyst species (the Group 3-10 or Lanthanide Series cation) which is formed when the two components are combined and sufficiently labile to be displaced by olefinic, diolefinic and acetylenically unsaturated substrates or other neutral Lewis bases such as ethers, nitriles and the like. Suitable metals, then, include but are not limited to, aluminum, gold, platinum and the like. Suitable metalloids include, but are not limited to, boron, phosphorus, silicon and the like. Compounds containing anions which comprise coordination complexes containing a single metal or metalloid atom are, of course, well known and many, particularly such compounds containing a single boron atom in the anion portion, are available commercially. In light of this, salts containing anions comprising a coordination complex containing a single boron atom are preferred.

[0094] Highly preferably, the second component useful in the preparation of the catalysts of this invention may be represented by the following general formula:



30

wherein:

L is a neutral Lewis base;

(L-H)⁺ is a Bronsted acid; and

35

[A]⁻ is a compatible, noncoordinating anion.

[0095] More preferably [A]⁻ corresponds to the formula:



40

wherein:


M⁺ is a metal or metalloid selected from Groups 5-15 of the Periodic Table of the Elements; and

45

Q independently each occurrence is selected from the Group consisting of hydride, dialkylamido, halide, alkoxide, aryloxy, hydrocarbyl, and substituted-hydrocarbyl radicals of up to 20 carbons with the proviso that in not more than one occurrence is Q halide and q is one more than the valence of M⁺.

50

[0096] Second components comprising boron which are particularly useful in the preparation of catalysts of this invention may be represented by the following general formula:



55


wherein:

L is a neutral Lewis base;

[L-H]⁺ is a Bronsted acid;
 B is boron in a valence state of 3; and
 Q is as previously defined.

5 [0097] Illustrative, but not limiting, examples of boron compounds which may be used as a second component in the preparation of the improved catalysts of this invention are trialkyl-substituted ammonium salts such as triethylammonium tetraphenylborate, tripropylammonium tetraphenylborate, tris(n-butyl)ammonium tetraphenylborate, trimethylammonium tetrakis(p-tolyl)borate, tributylammonium tetrakis(pentafluorophenyl)borate, tripropylammonium tetrakis(2,4-dimethylphenyl)borate, tributylammonium tetrakis(3,5-dimethylphenyl)borate, triethylammonium tetrakis(3,5-difluoromethylphenyl)borate and the like. Also suitable are N,N-dialkyl anilinium salts such as N,N-dimethyl-anilinium tetraphenylborate, N,N-diethylanilinium tetraphenylborate, N,N-2,4,6-pentamethylanilinium tetraphenylborate and the like; dialkylammonium salts such as di-(i-propyl) ammonium tetrakis(pentafluorophenyl)borate, dicyclohexylammonium tetraphenylborate and the like; and triaryl phosphonium salts such as triphenylphosphonium tetraphenylborate, tri(methylphenyl)phosphonium tetrakis-pentafluorophenylborate, tri(dimethylphenyl)phosphonium tetraphenylborate and the like.


15 [0098] Preferred ionic catalysts are those having a limiting charge separated structure corresponding to the formula:

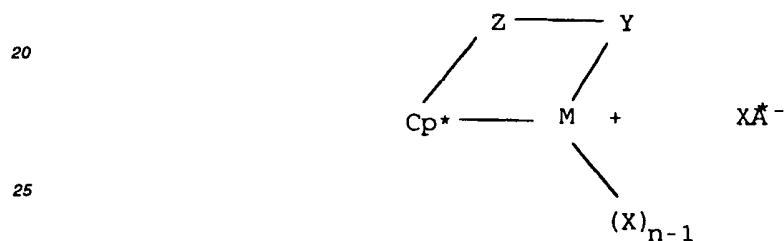

30 wherein:

M is a metal of group 3-10, or the Lanthanide series of the Periodic Table of the Elements;
 Cp* is a cyclopentadienyl or substituted cyclopentadienyl group bound in an η^5 bonding mode to M;
 Z is a moiety comprising boron, or a member of group 14 of the Periodic Table of the Elements, and optionally sulfur or oxygen, said moiety having up to 20 non-hydrogen atoms, and optionally Cp* and Z together form a fused ring system;
 X independently each occurrence is an anionic ligand group or neutral Lewis base ligand group having up to 30 non-hydrogen atoms;
 n is 0, 1, 2, 3, or 4 and is 2 less than the valence of M; and
 40 XA⁻ is -XB(C₆F₅)₃.

[0099] This class of cationic complexes may be conveniently prepared by contacting a metal compound corresponding to the formula:

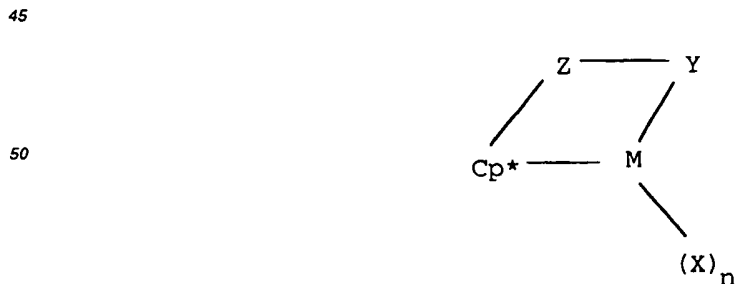


wherein: Cp*, M, and n are as previously defined,
 with tris(pentafluorophenyl)borane cocatalyst under conditions to cause abstraction of X and formation of the anion

$\text{XB}(\text{C}_6\text{F}_5)_3$.

[0100] Preferably X in the foregoing ionic catalyst is C_1 - C_{10} hydrocarbonyl, most preferably methyl.

[0101] The preceding formula is referred to as the limiting, charge separated structure. However, it is to be understood that, particularly in solid form, the catalyst may not be fully charge separated. That is, the X group may retain a partial covalent bond to the metal atom, M. Thus, the catalysts may be alternately depicted as possessing the formula:



[0102] The catalysts are preferably prepared by contacting the derivative of a Group 4 or Lanthanide metal with the tris(pentafluorophenyl)borane in an inert diluent such as an organic liquid. Tris(pentafluorophenyl)borane is a commonly available Lewis acid that may be readily prepared according to known techniques. The compound is disclosed in Marks, et al. *J. Am. Chem. Soc.* 1991, 113, 3623-3625 for use in alkyl abstraction of zirconocenes.

[0103] All reference to the Periodic Table of the Elements herein shall refer to the Periodic Table of the Elements, published and copyrighted by CRC Press, Inc., 1989. Also, any reference to a Group or Groups shall be to the Group or Groups as reflected in this Periodic Table of the Elements using the IUPAC system for numbering groups.

[0104] It is believed that in the constrained geometry catalysts used herein the metal atom is forced to greater exposure of the active metal site because one or more substituents on the single cyclopentadienyl or substituted metal is both bonded to an adjacent covalent moiety and held in association with the cyclopentadienyl group through an η^5 or other π -bonding interaction. It is understood that each respective bond between the metal atom and the constituent atoms of the cyclopentadienyl or substituted cyclopentadienyl group need not be equivalent. That is, the metal may be symmetrically or unsymmetrically π -bound to the cyclopentadienyl or substituted cyclopentadienyl group.

[0105] The geometry of the active metal site is further defined as follows. The centroid of the cyclopentadienyl or substituted cyclopentadienyl group may be defined as the average of the respective X, Y, and Z coordinates of the atomic centers forming the cyclopentadienyl or substituted cyclopentadienyl group. The angle, Q, formed at the metal center between the centroid of the cyclopentadienyl or substituted cyclopentadienyl group and each other ligand of the metal complex may be easily calculated by standard techniques of single crystal X-ray diffraction. Each of these angles may increase or decrease depending on the molecular structure of the constrained geometry metal complex. Those complexes wherein one or more of the angles, Q, is less than in a similar, comparative complex differing only in the fact that the constrain inducing substituent is replaced by hydrogen, have constrained geometry for purposes of the present invention. Preferably one or more of the above angles, Q, decrease by at least 5 percent, more preferably 7.5 percent, compared to the comparative complex. Highly preferably, the average value of all bond angles, Q, is also less than in the comparative complex.

[0106] Preferably, monocyclopentadienyl metal coordination complexes of group 4 or lanthanide metals according to the present invention have constrained geometry such that the smallest angle, Q, between the centroid of the Cp^* group and the Y substituent, is less than 115° , more preferably less than 110° , most preferably less than 105° , and especially less than 100° .

[0107] Other compounds which are useful in the catalyst compositions of this invention, especially compounds containing other Group 4 or Lanthanide metals, will, of course, be apparent to those skilled in the art.

Polymerization

[0108] The improved melt elasticity and processibility of the ethylene polymers according to the present invention result, it is believed, from their method of production. The polymers may be produced via a continuous (as opposed to a batch) controlled polymerization process using at least one reactor, but can also be produced using multiple reactors (e.g., using a multiple reactor configuration as described in US-A-3,914,342) at a polymerization temperature and pressure sufficient to produce the interpolymers having the desired properties.

[0109] In polymerizing ethylene and ethylene/ α -olefin copolymers, a batch reactor process typically operates at an

ethylene concentration from about 6.7 to about 12.5 percent by weight of the reactor contents and have a polymer concentration generally less than about 5 percent by weight of the reactor contents, dependent upon the ethylene solubility, which is a function of reactor temperature and pressure.

[0110] According to one embodiment of the present process, the polymers are produced in a continuous process, as opposed to a batch process. Preferably, the polymerization temperature of the continuous process is from about 20°C to about 250°C, using constrained geometry catalyst technology. If a narrow molecular weight distribution polymer (M_w/M_n of from about 1.5 to about 2.5) having a higher I_{10}/I_2 ratio (e.g. I_{10}/I_2 of 7 or more, preferably at least 8, especially at least 9) is desired, the ethylene concentration in the reactor is preferably not more than about 8 percent by weight of the reactor contents, especially not more than about 6 percent by weight of the reactor contents, and most especially not more than about 4 percent by weight of the reactor contents. Preferably, the polymerization is performed in a solution polymerization process. Generally, manipulation of I_{10}/I_2 while holding M_w/M_n relatively low for producing the novel polymers described herein is a function of reactor temperature and/or ethylene concentration. Reduced ethylene concentration and higher temperature generally produces higher I_{10}/I_2 . Generally, as the ethylene concentration of the reactor decreases, the polymer concentration increases. For the novel substantially linear ethylene/ α -olefin copolymers and substantially linear ethylene homopolymers obtainable by the continuous process claimed herein, the polymer concentration for a continuous solution polymerization process is preferably above about 5 weight percent of the reactor contents, especially above about 6 weight percent of the reactor contents.

[0111] The polymers obtainable by the continuous process of the present invention can be homopolymers ethylene, or they can be interpolymers of ethylene with at least one C_3 - C_{20} α -olefin (propylene, 4-methyl-1-pentene, etc.) and/or C_2 - C_{20} acetylenically unsaturated monomer and/or C_4 - C_{18} diolefins. The substantially linear polymers obtainable by the process of the present invention can also be interpolymers of ethylene with at least one of the above C_3 - C_{20} α -olefins, diolefins and/or acetylenically unsaturated monomers in combination with other unsaturated monomers.

[0112] Monomers usefully polymerized according to the present invention include, for example, ethylenically unsaturated monomers, acetylenic compounds, conjugated or nonconjugated dienes, polyenes, carbon monoxide, etc. Preferred monomers include the C_2 - C_{10} α -olefins especially ethylene, 1-propene, isobutylene, 1-butene, 1-hexene, 4-methyl-1-pentene, and 1-octene. Other preferred monomers include styrene, halo- or alkyl substituted styrenes, tetrafluoroethylene, vinylbenzocyclobutane, 1,4-hexadiene, and naphthenics (e.g., cyclopentene, cyclohexene and cyclooctene).

[0113] Other unsaturated monomers usefully polymerized according to the present invention include, for example, ethylenically unsaturated monomers, conjugated or nonconjugated dienes, polyenes, etc. Preferred monomers include the C_2 - C_{10} α -olefins especially ethylene, propene, isobutylene, 1-butene, 1-hexene, 4-methyl-1-pentene, and 1-octene. Other preferred monomers include styrene, halo- or alkyl substituted styrenes, tetrafluoroethylene, vinylbenzocyclobutane, 1,4-hexadiene, and naphthenics (e.g., cyclopentene, cyclohexene and cyclooctene).

[0114] The polymerization conditions for manufacturing the polymers of the present invention are generally those useful in the solution polymerization process, although the application of the present invention is not limited thereto. Slurry and gas phase polymerization processes are also believed to be useful, provided the proper catalysts and polymerization conditions are employed.

[0115] Multiple reactor polymerization processes are also useful in the present invention, such as those disclosed in US-A-3,914,342. The multiple reactors can be operated in series or in parallel, with at least one constrained geometry catalyst employed in at least one of the reactors.

[0116] In general, the continuous polymerization according to the present invention may be accomplished at conditions well known in the prior art for Ziegler-Natta or Kaminsky-Sinn type polymerization reactions, that is, temperatures from 0 to 250°C and pressures from atmospheric to 1000 atmospheres (100 MPa). Suspension, solution, slurry, gas phase or other process conditions may be employed if desired. A support may be employed but preferably the catalysts are used in a homogeneous (i.e., soluble) manner. It will, of course, be appreciated that the active catalyst system, especially nonionic catalysts, form *in situ* if the catalyst and the cocatalyst components thereof are added directly to the polymerization process and a suitable solvent or diluent, including condensed monomer, is used in said polymerization process. It is, however, preferred to form the active catalyst in a separate step in a suitable solvent prior to adding the same to the polymerization mixture.

[0117] The polymerization conditions for manufacturing the polymers of the present invention are generally those useful in the solution polymerization process, although the application of the present invention is not limited thereto. Gas phase polymerization processes are also believed to be useful, provided the proper catalysts and polymerization conditions are employed.

[0118] Fabricated articles made from the novel olefin polymers may be prepared using all of the conventional polyolefin processing techniques. Useful articles include films (e.g., cast, blown and extrusion coated), fibers (e.g., staple fibers (including use of a novel olefin polymer disclosed herein as at least one component comprising at least a portion of the fiber's surface), spunbond fibers or melt blown fibers (using, e.g., systems as disclosed in US-A-4,340,563, US-A-4,663,220, US-A-4,668,566, or US-A-4,322,027), and gel spun fibers (e.g., the system disclosed in US-A-

4,413,110)), both woven and nonwoven fabrics (e.g., spunlaced fabrics disclosed in US-A-3,485,706) or structures made from such fibers (including, e.g., blends of these fibers with other fibers, e.g., PET or cotton) and molded articles (e.g., made using an injection molding process, a blow molding process or a rotomolding process). The new polymers described herein are also useful for wire and cable coating operations, impact modification, especially at low temperatures, of thermoplastic olefins (e.g., polypropylene), as well as in sheet extrusion for vacuum forming operations.

[0119] Useful compositions are also suitably prepared comprising the substantially linear polymers of the present invention and at least one other natural or synthetic polymer. Preferred other polymers include thermoplastics such as styrene-butadiene block copolymers, polystyrene (including high impact polystyrene), ethylene vinyl alcohol copolymers, ethylene acrylic acid copolymers, other olefin copolymers (especially polyethylene copolymers) and homopolymers (e.g., those made using conventional heterogeneous catalysts). Examples include polymers made by the process of US-A-4,076,698, other linear or substantially linear polymers of the present invention, and mixtures thereof. Other substantially linear polymers of the present invention and conventional HDPE and/or LLDPE are preferred for use in the thermoplastic compositions.

[0120] The compositions comprising the substantially linear olefin polymers are formed by any convenient method, including dry blending the individual components and subsequently melt mixing, either directly in the extruder used to make the finished article (e.g., film), or by pre-melt mixing in a separate extruder. The polyethylene compositions may also be prepared by multiple reactor polymerization techniques. For example, one reactor may polymerize the constrained geometry catalyzed polyethylene and another reactor polymerize the heterogeneous catalyzed polyethylene, either in series or in parallel operation.

[0121] Compositions comprising the olefin polymers can also be formed into fabricated articles such as those previously mentioned using conventional polyolefin processing techniques which are well known to those skilled in the art of polyolefin processing.

[0122] For examples described herein, unless otherwise stipulated, all procedures were performed under an inert atmosphere or nitrogen or argon. Solvent choices were often optional, for example, in most cases either pentane or 30-60 petroleum ether can be interchanged. Amines, silanes, lithium reagents, and Grignard reagents were purchased from Aldrich Chemical Company. Published methods for preparing tetramethylcyclopentadiene ($C_5Me_4H_2$) and lithium tetramethylcyclopentadienide ($Li(C_5Me_4H)$) include C. M. Fendrick et al. *Organometallics*, 3, 819 (1984). Lithiated substituted cyclopentadienyl compounds may be typically prepared from the corresponding cyclopentadiene and a lithium reagent such as n-butyl lithium. Titanium trichloride ($TiCl_3$) was purchased from Aldrich Chemical Company. The tetrahydrofuran adduct of titanium trichloride, $TiCl_3(THF)_3$, was prepared by refluxing $TiCl_3$ in THF overnight, cooling, and isolating the blue solid product, according to the procedure of L. E. Manzer, *Inorg. Syn.*, 21, 135 (1982).

Examples 1-4

[0123] The metal complex solution for Example 1 is prepared as follows:

Part 1: Prep of $Li(C_5Me_4H)$

[0124] In the drybox, a 3L 3-necked flask was charged with 18.34 g of $C_5Me_4H_2$, 800 mL of pentane, and 500 mL of ether. The flask was topped with a reflux condenser, a mechanical stirrer, and a constant addition funnel containing 63 mL of 2.5 M n-BuLi in hexane. The BuLi was added dropwise over several hours. A very thick precipitate formed; approx. 1000 mL of additional pentane had to be added over the course of the reaction to allow stirring to continue. After the addition was complete, the mixture was stirred overnight. The next day, the material was filtered, and the solid was thoroughly washed with pentane and then dried under reduced pressure. 14.89 g of $Li(C_5Me_4H)$ was obtained (78 percent).

Part 2: Prep of $C_5Me_4HSiMe_2Cl$

[0125] In the drybox 30.0 g of $Li(C_5Me_4H)$ was placed in a 500 mL Schlenk flask with 250 mL of THF and a large magnetic stir bar. A syringe was charged with 30 mL of Me_2SiCl_2 and the flask and syringe were removed from the drybox. On the Schlenk line under a flow of argon, the flask was cooled to $-78^\circ C$, and the Me_2SiCl_2 added in one rapid addition. The reaction was allowed to slowly warm to room temperature and stirred overnight. The next morning the volatile materials were removed under reduced pressure, and the flask was taken into the drybox. The oily material was extracted with pentane, filtered, and the pentane was removed under reduced pressure to leave the $C_5Me_4HSiMe_2Cl$ as a clear yellow liquid (46.83 g; 92.9 percent).

Part 3: Prep of $C_5Me_4HSiMe_2NH^tBu$

[0126] In the drybox, a 3-necked 2 L flask was charged with 37.4 g of t-butylamine and 210 mL of THF. $C_5Me_4HSiMe_2Cl$ (25.47 g) was slowly dripped into the solution over 3-4 hours. The solution turned cloudy and yellow. The mixture was stirred overnight and the volatile materials removed under reduced pressure. The residue was extracted with diethyl ether, the solution was filtered, and the ether removed under reduced pressure to leave the $C_5Me_4HSiMe_2NH^tBu$ as a clear yellow liquid (26.96 g; 90.8 percent).

Part 4: Prep of $[MgCl]_2[Me_4C_5SiMe_2N^tBu] (THF)_x$

[0127] In the drybox, 14.0 mL of 2.0 M isopropylmagnesium chloride in ether was syringed into a 250 mL flask. The ether was removed under reduced pressure to leave a colorless oil. 50 mL of a 4:1 (by volume) toluene:THF mixture was added followed by 3.50 g of $Me_4HC_5SiMe_2NH^tBu$. The solution was heated to reflux. After refluxing for 2 days, the solution was cooled and the volatile materials removed under reduced pressure. The white solid residue was slurried in pentane and filtered to leave a white powder, which was washed with pentane and dried under reduced pressure. The white powder was identified as $[MgCl]_2[Me_4C_5SiMe_2N^tBu] (THF)_x$ (yield: 6.7 g).

Part 5: Prep of $[C_5Me_4(SiMe_2N^tBu)]TiCl_2$

[0128] In the drybox, 0.50 g of $TiCl_3(THF)_3$ was suspended in 10 mL of THF. 0.69 g of solid $[MgCl]_2[Me_4C_5SiMe_2N^tBu] (THF)_x$ was added, resulting in a color change from pale blue to deep purple. After 15 minutes, 0.35 g of AgCl was added to the solution. The color immediately began to lighten to a pale green/yellow. After 1.5 hours, the THF was removed under reduced pressure to leave a yellow-green solid. Toluene (20 mL) was added, the solution was filtered, and the toluene was removed under reduced pressure to leave a yellow-green solid, 0.51 g (quantitative yield) identified by 1H NMR as $[C_5Me_4(SiMe_2N^tBu)]TiCl_2$.

Part 6: Preparation of $[C_5Me_4(SiMe_2N^tBu)]TiMe_2$

[0129] In an inert atmosphere glove box, 9.031 g of $[C_5Me_4(Me_2SiN^tBu)]TiCl_2$ is charged into a 250 ml flask and dissolved into 100 ml of THF. This solution is cooled to about $-25^\circ C$ by placement in the glove box freezer for 15 minutes. To the cooled solution is added 35 ml of a 1.4 M MeMgBr solution in toluene/THF (75/25). The reaction mixture is stirred for 20 to 25 minutes followed by removal of the solvent under vacuum. The resulting solid is dried under vacuum for several hours. The product is extracted with pentane (4x50 ml) and filtered. The filtrate is combined and the pentane removed under vacuum giving the catalyst as a straw yellow solid.

[0130] The metal complex, $[C_5Me_4(SiMe_2N^tBu)]TiMe_2$, solution for Examples 2 and 3 is prepared as follows:

[0131] In an inert atmosphere glove box 10.6769 g of a tetrahydrofuran adduct of titanium trichloride, $TiCl_3(THF)_3$, is loaded into a 1 L flask and slurried into 300 ml of THF. To this slurry, at room temperature, is added 17.402 g of $[MgCl]_2[N^tBuSiMe_2C_5Me_4] (THF)_x$ as a solid. An additional 200 ml of THF is used to help wash this solid into the reaction flask. This addition resulted in an immediate reaction giving a deep purple solution. After stirring for 5 minutes 9.23 ml of a 1.56 M solution of CH_2Cl_2 in THF is added giving a quick color change to dark yellow. This stage of the reaction is allowed to stir for about 20 to 30 minutes. Next, 61.8 ml of a 1.4 M MeMgBr solution in toluene/THF (75/25) is added via syringe. After about 20 to 30 minutes stirring time the solvent is removed under vacuum and the solid dried. The product is extracted with pentane (8x50ml) and filtered. The filtrate is combined and the pentane removed under vacuum giving the metal complex as a tan solid.

[0132] The metal complex, $[C_5Me_4(SiMe_2N^tBu)]TiMe_2$, solution for Example 4 is prepared as follows:

[0133] In an inert atmosphere glove box 4.8108 g of $TiCl_3(thf)_3$ is placed in a 500 ml flask and slurried into 130 ml of THF. In a separate flask 8.000 g of $[MgCl]_2[N^tBuSiMe_2C_5Me_4] (THF)_x$ is dissolved into 150 ml of THF. These flasks are removed from the glove box and attached to a vacuum line and the contents cooled to $-30^\circ C$. The THF solution of $[MgCl]_2[N^tBuSiMe_2C_5Me_4] (THF)_x$ is transferred (over a 15 minute period) via cannula to the flask containing the $TiCl_3(THF)_3$ slurry. This reaction is allowed to stir for 1.5 hours over which time the temperature warmed to $0^\circ C$ and the solution color turned deep purple. The reaction mixture is cooled back to $-30^\circ C$ and 4.16 ml of a 1.56 M CH_2Cl_2 solution in THF is added. This stage of the reaction is stirred for an additional 1.5 hours and the temperature warmed to $-10^\circ C$. Next, the reaction mixture is again cooled to $-40^\circ C$ and 27.81 ml of a 1.4 M MeMgBr solution in toluene/THF (75/25) was added via syringe and the reaction is now allowed to warm slowly to room temperature over 3 hours. After this time the solvent is removed under vacuum and the solid dried. At this point the reaction flask is brought back into the glove box where the product is extracted with pentane (4x50 ml) and filtered. The filtrate is combined and the pentane removed under vacuum giving the catalyst as a tan solid. The metal complex is then dissolved into a mixture of C_8-C_{10} saturated hydrocarbons (e.g., Isopar® E, made by Exxon) and ready for use in polymerization.

Polymerization

[0134] The polymer products of Examples 1-4 are produced in a solution polymerization process using a continuously stirred reactor. Additives (e.g., antioxidants, pigments, etc.) can be incorporated into the interpolymer products either during the pelletization step or after manufacture, with a subsequent re-extrusion. Examples 1-4 are each stabilized with 1250 ppm Calcium Stearate, 200 ppm Irganox 1010, and 1600 ppm Irgafos 168. Irgafos® 168 is a phosphite stabilizer and Irganox® 1010 is a hindered polyphenol stabilizer (e.g., tetrakis [methylene 3-(3,5-ditert.butyl-4-hydroxyphenyl)propionate]methane. Both are trademarks of and made by Ciba-Geigy Corporation. A representative schematic for the polymerization process is shown in Figure 1.

[0135] The ethylene (4) and the hydrogen are combined into one stream (15) before being introduced into the 20 diluent mixture (3). Typically, the diluent mixture comprises a mixture of C₈-C₁₀ saturated hydrocarbons (1), (e.g., Isopar® E, made by Exxon) and the comonomer(s) (2). For example 1, the comonomer is 1-octene. The reactor feed mixture (6) is continuously 25 injected into the reactor (9). The metal complex (7) and the cocatalyst (8) (the cocatalyst is tris(pentafluorophenyl)borane for Examples 1-4 herein which forms the ionic catalyst insitu) are combined into a single stream and also continuously injected into the reactor. Sufficient residence time is allowed for the metal complex and cocatalyst to react to the desired extent for use in the polymerization reactions, at least about 10 seconds. For the polymerization reactions of Examples 1-4, the reactor pressure is held constant at about 490 psig. Ethylene content of the reactor, after reaching steady state, is maintained below about 8 percent.

[0136] After polymerization, the reactor exit stream (14) is introduced into a separator (10) where the molten polymer is separated from the unreacted comonomer(s), unreacted ethylene, unreacted hydrogen, and diluent mixture stream (13). The molten polymer is subsequently strand chopped or pelletized and, after being cooled in a water bath or pelletizer (11), the solid pellets are collected (12). Table 1 describes the polymerization conditions and the resultant polymer properties:

Table 1

Example	1	2	3	4
Ethylene feed rate (lbs/hour)	3.2	3.8	3.8	3.8
Comonomer/Olefin* ratio (mole percent)	12.3	0	0	0
Hydrogen/ethylene ratio (mole percent)	0.054	0.072	0.083	0.019
Diluent/ethylene ratio (weight basis)	9.5	7.4	8.7	8.7
Metal complex conc. (molar)	0.00025	0.0005	0.001	0.001
Metal complex flow rate (ml/min)	5.9	1.7	2.4	4.8
Cocatalyst conc. (molar)	0.001	0.001	0.002	0.002
Cocatalyst flow rate (ml/min)	2.9	1.3	6	11.9
Reactor temp (°C)	114	160	160	200
Ethylene conc. in the reactor exit stream (weight percent)	2.65	3.59	0.86	1.98
Product I ₂ (g/10 minutes)	1.22	0.96	1.18	0.25
Product density (g/cm ³)	0.903	0.954	0.954	0.953
Product I ₁₀ /I ₂	6.5	7.4	11.8	16.1
Product M _w /M _n	1.86	1.95	2.09	2.07

*For Examples 1-4, the Comonomer/Olefin ratio is defined as the percentage molar ratio of ((1-octene)/(1-octene + ethylene))

[0137] The ¹³C NMR spectrum of Example 3 (ethylene homopolymer) shows peaks which can be assigned to the ad+, bd+, and methine carbons associated with a long chain branch. Long chain branching is determined using the method of Randall described earlier in this disclosure, wherein he states that "Detection of these resonances in high-density polyethylenes where no olefins were added during the polymerization should be strongly indicative of the presence of long chain branching." Using the equation 141 from Randall (p. 292) :

$$\text{Branches per 10,000 carbons} = [((1/3) (a))/T_{\text{Tot}})] \times 10^4,$$

wherein a = the average intensity of a carbon from a branch (ad+) carbon and T_{Tot} = the total carbon intensity, the number of long chain branches in this sample is determined to be 3.4 per 10,000 carbon atoms, or 0.34 long chain branches/1000 carbon atoms.

Examples 5, 6 and Comparative Examples 7-9

[0138] Examples 5, 6 and comparison examples 7-9 with the same melt index are tested for rheology comparison. Examples 5 and 6 are the substantially linear polyethylenes produced by the constrained geometry catalyst technology, as described in Examples 1-4. Examples 5 and 6 are stabilized as Examples 1-4. Comparison examples 7, 8 and 9 are conventional heterogeneous Ziegler polymerization blown film resins Dowlex® 2045A, Attane® 4201, and Attane® 4403, respectively, all of which are ethylene/1-octene copolymers made by The Dow Chemical Company.

[0139] Comparative example 7 is stabilized with 200 ppm Irganox® 1010, and 1600 ppm Irgafos® 168 while comparative examples 8 and 9 are stabilized with 200 ppm Irganox® 1010 and 800 ppm PEPO®. PEPO® is a trademark of Sandoz Chemical, the primary ingredient of which is believed to be tetrakis-(2,4-ditertbutyl-phenyl)-4,4' biphenyl-phosphonite. A comparison of the physical properties of each example and comparative example is listed in Table 2.

Table 2

Property	Ex. 5	Ex. 6	Comparative example 7	Comparative example 8	Comparative example 9
I_2 (g per 10 min)	1	1	1	1	0.76
Density (g/cm ³)	0.92	0.902	0.92	0.912	0.905
I_{10}/I_2	9.45	7.61	7.8 - 8	8.2	8.7
M_w/M_n	1.97	2.09	3.5 - 3.8	3.8	3.8 - 4

[0140] Surprisingly, even though the molecular weight distribution of Examples 5 and 6 is narrow (i.e., M_w/M_n is low), the I_{10}/I_2 values are higher in comparison with comparative examples 7-9. A comparison of the relationship between I_{10}/I_2 vs. M_w/M_n for some of the novel polymers described herein and conventional heterogeneous Ziegler polymers is given in Figure 2. The I_{10}/I_2 value for the novel polymers of the present invention is essentially independent of the molecular weight distribution, M_w/M_n which is not true for conventional Ziegler polymerized resins. Example 5 and comparative example 7 with similar melt index and density (Table II) are also extruded via a Gas Extrusion Rheometer (GER) at 190°C

using a 0.0296" diameter, 20 L/D die. The processing index (P.I.) is measured at an apparent shear stress of 2.15×10^6 dyne/cm² as described previously. The onset of gross melt fracture can easily be identified from the shear stress vs. shear rate plot shown in Figure 3 where a sudden jump of shear rate occurs. A comparison of the shear stresses and corresponding shear rates before the onset of gross melt fracture is listed in Table 3. It is particularly interesting that the PI of Example 5 is more than 20 percent lower than the PI of comparative example 7 and that the onset of melt fracture or sharkskin for Example 5 is also at a significantly higher shear stress and shear rate in comparison with the comparative example 7. Furthermore, the Melt Tension (MT) as well as Elastic Modulus of Example 5 are higher than that of comparative example 7.

Table 3

Property	Example 5	Comparative example 7
I_2 (g/ 10 min)	1	1
I_{10}/I_2	9.45	7.8 - 8
PI (kpoise)	11	15
Melt tension (gms).	1.89	1.21
Elastic modulus at 0.1 rad/sec (dynes/cm ²)	2425	882.6
OGMF*, critical shear rate (1/sec)	> 1556 (not observed)	936
OGMF*, critical shear stress (MPa)	0.452	0.366

* Onset of Gross Melt Fracture.

Table 3 (continued)

Property	Example 5	Comparative example 7
OSMF**, critical shear rate (1/sec)	>1566 (not observed)	about 628
OSMF**, critical shear stress (MPa)	about 0.452	about 0.25

** Onset of Surface Melt Fracture.

[0141] Example 6 and comparative example 9 have similar melt index and density, but example 6 has lower I_{10}/I_2 (Table 4). These polymers are extruded via a Gas Extrusion Rheometer (GER) at 190°C using a 0.0296 inch diameter, 20:1 L/D die. The processing index (PI) is measured at an apparent shear stress of 2.15×10^6 dyne/cm² as described previously.

Table 4

Property	Example 6	Comparative example 9
I_2 (g/ 10 min)	1	0.76
I_{10}/I_2	7.61	8.7
PI (kpoise)	14	15
Melt tension (gms)	1.46	1.39
Elastic modulus at 0.1 rad/sec (dynes/cm ²)	1481	1921
OGMF*, critical shear rate (1/sec)	1186	652
OGMF*, critical shear stress (MPa)	0.431	0.323
OSMF**, critical shear rate (1/sec)	about 764	about 402
OSMF**, critical shear stress (MPa)	0.366	0.280

* Onset of Gross Melt Fracture.

** Onset of Surface Melt Fracture.

[0142] The onset of gross melt fracture can easily be identified from the shear stress vs. shear rate plot shown in Figure 4 where a sudden increase of shear rate occurs at an apparent shear stress of about 3.23×10^6 dyne/cm² (0.323 MPa). A comparison of the shear stresses and corresponding shear rates before the onset of gross melt fracture is listed in Table 4. The PI of Example 6 is surprisingly about the same as comparative example 9, even though the I_{10}/I_2 is lower for Example 6. The onset of melt fracture or sharkskin for Example 6 is also at a significantly higher shear stress and shear rate in comparison with the comparative example 9. Furthermore, it is also unexpected that the Melt Tension (MT) of Example 6 is higher than that of comparative example 9, even though the melt index for Example 6 is slightly higher and the I_{10}/I_2 is slightly lower than that of comparative example 9.

Comparative examples 10-19

[0143] Batch ethylene/1-octene polymerizations were conducted under the following conditions:

Preparation of $[\text{HNEt}_3]^+[\text{MeB}(\text{C}_6\text{F}_5)_3]^-$

[0144] A 100 ml flask was charged with 1.00 gram of tris(pentafluorophenyl)boron (1.95 mmol) and 70 ml of anhydrous pentane. After dissolution, 1.5 ml of MeLi (1.4 M in diethyl ether, 2.1 mmol, 1.07 equiv) was added at 25°C via syringe. A milky white mixture formed immediately and, after several minutes, two phases formed. The mixture was stirred for 15 hr and then the upper layer decanted. The viscous lower layer was washed twice with 30 ml of pentane and concentrated in vacuo for 2 hours to give a clear, colorless, viscous oil. Under nitrogen, the oil was quenched with a 40 ml of an aqueous 0.5 M HNEt_3Cl solution (20 mmol, 10 equiv) which had previously been cooled to 0°C. A white, gooey precipitate formed instantly. After two minutes, the solid was collected by filtration and washed twice with 20 ml

of 0.5 M HNEt_3Cl solution followed by two washings with distilled water. The solid was dehydrated under high vacuum at 25°C for 15 hours to give a powdery white solid (0.77 grams, 63%) which was identified as the desired triethylammonium tris(pentafluorophenyl)methylborate salt.

5 Preparation of $[\text{HNEt}_3] + [(\text{allyl})\text{B}(\text{C}_6\text{F}_5)_3]^-$

[0145] A 100 ml flask was charged with 1.00 gram of tris(pentafluorophenyl)boron (1.95 mmol) and 40 ml of anhydrous pentane. After dissolution, 2.05 ml of (allyl)MgBr (1.0 M in diethyl ether, 2.05 mmol, 1.05 equiv) was added at 25°C via syringe. A cloudy white mixture formed immediately and, after several minutes, two phases formed. The mixture was stirred for 15 hr and then the upper layer decanted. The viscous lower layer was washed twice with 30 ml of pentane and concentrated in vacuo for 2 hours to give a clear, colorless, viscous oil. Under nitrogen, the oil was quenched with a 40 ml of an aqueous 0.5 M HNEt_3Cl solution (20 mmol, 10 equiv) which had previously been cooled to 0°C. A gooeey, white precipitate formed after several minutes. The solid was collected by filtration and washed twice with 20 ml of 0.5 M HNEt_3Cl solution followed by two washings with distilled water. The solid was dehydrated under high vacuum at 25°C for 15 hours to give a pasty white solid (0.39 grams, 30%) which was identified as the desired triethylammonium tris(pentafluorophenyl)allylborate salt.

Batch Reactor Polymerization Procedure

[0146] A 2 L stirred autoclave was charged with the desired amounts of a mixed alkane solvent (Isopar E, available from Exxon Chemicals, Inc.) and 1-octene comonomer. The reactor was heated to the polymerization temperature. Hydrogen was added by differential pressure expansion from a 75 ml addition tank.

[0147] The term "hydrogen Δ psi" in Table 1 represents the difference in pressure between the starting and final pressure in the hydrogen addition tank after adding hydrogen to the 21 reactor containing a total of approximately 1200 ml of solvent and 1-octene. The reactor was heated to the polymerization temperature and was saturated with ethylene to the desired pressure. For these experiments, a constant ethylene/solvent pressure of about 500 psig at a temperature of 140°C corresponds to an ethylene concentration of about 8.4 percent by weight of the reactor contents. Metal complex and cocatalyst were mixed in a drybox by syringing the desired amount of 0.0050 M metal complex solution (in Isopar® E or toluene) into a solution of the cocatalyst (in Isopar® E or toluene). This solution was then transferred to a catalyst addition tank and injected into the reactor. The polymerization was allowed to proceed for the desired time and then the solution was drained from the bottom of the reactor and quenched with isopropanol. About 100 mg of a hindered phenolic antioxidant (Irganox® 1010, available from Ciba-Geigy corporation) was added and the polymer was air dried overnight. The residual solvent was removed in a vacuum oven overnight. The results are shown in Table 5 and 5A:

Table 5

Comp. Ex.	H_2 Δ psi	1-octene (gms)	Isopar E (gms)	yield (gms)	Effcn. (gm/gm Ti)
10A*	50	38	820	39.6	330,689
11A*	25	38	820	70.1	390,257
12A*	35	38	820	46.4	258,316
13A*	30	38	820	48.8	271,677
14A*	35	30	828	52.1	290,049
15A*	27	38	820	36.5	152,401
16A**	26	38	820	47.8	266,110
17B***	35	40	818	19.7	41,127
18B***	50	40	818	19.7	41,127
19B***	25	40	818	18.3	38,204

A = metal complex of $[(\text{C}_5\text{Me}_4)\text{SiMe}_2\text{N}(\text{t-Bu})]\text{TiMe}_2$ (as in USP '802)

B = metal complex of $[(\text{C}_5\text{Me}_4)\text{SiMe}_2\text{N}(\text{t-Bu})]\text{TiCl}_2$ (as in USP '798)

* = Cocatalyst of $[\text{Et}_3\text{NH}] + [(\text{allyl})\text{B}(\text{C}_6\text{F}_5)_3]^-$ (as in USP '802)

** = Cocatalyst of $[\text{Et}_3\text{NH}] + [(\text{Me})\text{B}(\text{C}_6\text{F}_5)_3]^-$ (as in USP '802)

*** = methyl aluminoxane (MAO) (as in USP '798) Reactor temperature is constant at about 140°C Ethylene/solvent pressure is constant at about 500 psig Run time is about 15 minutes

Table 5A

Comp. Ex.	μ moles complex	μ moles cocatalyst	Irgano x 1010 (ppm)
10A*	2.5	2.5	2500
11A*	3.75	3.75	1400
12A*	3.75	3.75	2200
13A*	3.75	3.75	2000
14A*	3.75	3.75	1900
15A*	5	5	2700
16A**	3.75	3.75	2000
17B***	10	5000	5000
18B***	10	5000	5000
19B***	10	5000	5500

A = metal complex of $[(C_5Me_4)SiMe_2N(t-Bu)] TiMe_2$ (as in USP '802)

B = metal complex of $[(C_5Me_4)SiMe_2N(t-Bu)] TiCl_2$ (as in USP '798)

* = Cocatalyst of $[Et_3NH] + [(allyl)B(C_6F_5)_3]^+$ (as in USP '802)

** = Cocatalyst of $[Et_3NH] + [(Me)B(C_6F_5)_3]^+$ (as in USP '802)

*** = methyl aluminoxane (MAO) (as in USP '798) Reactor temperature is constant at about 140°C Ethylene/solvent pressure is constant at about 500 psig Run time is about 15 minutes

[0148] The samples were each extruded via a Gas Extrusion Rheometer (GER) at 190°C using 0.0296 inch diameter die having L/D of 20 and entrance angle of 180°, as shown in the attached drawing. The OGMF can easily be identified from the shear stress vs. shear rate plot where a sudden jump of shear rate occurs or when the surface of the extrudate becomes very rough or irregular, or from deep ridges which can be clearly detected by visual observation. OSMF is characterized by fine scale surface irregularities ranging from loss of surface gloss to the more severe form of matte or sharkskin which can easily be seen using microscopy at a magnification of 10X.

[0149] Table 6 displays the test results from Comparative Examples 10-19:

Table 6

Ex	I_2 (gm per 10 min)	$10/I_2$	$(10/I_2) - .63$	Measure d M_w/M_n	* Shear Rate (sec ⁻¹)	* Shear Stress (MPa)
10	4.52	5.62	0.99	1.856	706	0.344
11	0.67	6.39	1.76	1.834	118	0.323
12	2.24	5.62	0.99	1.829	300	0.323
13	2.86	5.60	0.97	1.722	397	0.323
14	3.25	5.66	1.03	1.827	445	0.302
15	1.31	5.67	1.04	1.718	227	0.302
16	1.97	5.7	1.07	1.763	275	0.302
17	0.36	12.98	8.35	5.934	<29	<0.086
18	0.40	13.34	8.71	5.148	<11.08	<0.086
19	0.13	13.25	8.62	6.824	<10.39	<0.086

[0150] Comparative Examples 10 - 16 were prepared using the catalyst composition as described in U.S. Patent 5,064,802 (Stevens et al.) as described above. Comparative Examples 17 - 19 were prepared using the catalyst composition described in U.S. Patent 5,026,798 (Canich), as described above. All of the Comparative Polymer Examples made using a batch reactor at an ethylene concentration of about 8.4 percent by weight of the reactor contents or more tested had onset of gross melt fracture at a shear stress of less than or equal to 0.344 MPa (3.44×10^6 dynes/cm²).

[0151] Interestingly, an ethylene concentration of about 8.4 percent is considered to be on the low side for a batch

polymerization procedure, since it limits the reaction kinetics and slows the polymerization process. Increasing the ethylene concentration in a batch reactor, as is taught in U.S. Patent 5,026,798 (Canich), where the calculated propylene reactor concentrations for these ten examples ranges from a low of about 12.6 percent (Example 1) to a high of about 79 percent (Example 6), by weight of the reactor contents, results in polymerization of polymers which do not have the novel structure discovered by Applicants, as the OGMF data in Table 6 demonstrates. Furthermore, the I_1/I_2 ratio of such comparative polymers made using a batch reactor at relatively high ethylene concentrations increases as the molecular weight distribution, M_w/M_n , increases, as is expected based on conventional Ziegler polymerized polymers.

Example 20 and Comparative Example 21

[0152] Blown film is fabricated from two novel ethylene/1-octene polymers made in accordance with the present invention and from two comparative conventional polymers made according to conventional Ziegler catalysis. The blown films are tested for physical properties, including heat seal strength versus heat seal temperature (shown in Figure 5 for Examples 20 and 22 and comparative examples 21 and 23), machine (MD) and cross direction (CD) properties (e.g., tensile yield and break, elongation at break and Young's modulus). Other film properties such as dart, puncture, tear, clarity, haze, 20 degree (20°) gloss and block are also tested.

Blown Film Fabrication Conditions

[0153] The improved processing substantially linear polymers of the present invention produced via the procedure described earlier, as well as two comparative resins are fabricated on an Egan blown film line using the following fabrication conditions:

- 2 inch (5 cm) diameter extruder
- 3 inch (7.6 cm) die
- 30 mil die gap
- 25 RPM extruder speed
- 460°F (238°C) melt temperature
- 1 mil gauge
- 2.7:1 Blow up ratio (12.5 inches (31.7 cm) layflat)
- 12.5 inches (31.7 cm) frost line height

[0154] The melt temperature is kept constant by changing the extruder temperature profile. Frost line height is maintained at 12.5 inches (31.7 cm) by adjusting the air flow. The extruder output rate, back pressure and power consumption in amps are monitored throughout the experiment. The polymers of the present invention and the comparative polymers are all ethylene/1-octene copolymers. Table 7 summarizes physical properties of the two polymers of the invention and for the two comparative polymers:

Table 7

Property	Example 20	Comparative example 21	Example 22	Comparative example 23
I_2 (g/10 minutes)	1	1	1	0.8
Density (g/cm ³)	0.92	0.92	0.902	0.905
I_1/I_2	9.45	about 8	7.61	8.7
M_w/M_n	2	about 5	2	about 5

[0155] Tables 8 and 9 summarize the film properties measured for blown film made from two of these four polymers:

Table 8

Blown film properties				
Property	Ex. 20 MD	Ex. 20 CD	Comp. Ex. 21 MD	Comp. Ex. 21 CD
Tensile yield (psi)	1391	1340	1509	1593
Tensile break (psi)	7194	5861	6698	6854

Table 8 (continued)

Blown film properties				
Property	Ex. 20 MD	Ex. 20 CD	Comp. Ex. 21 MD	Comp. Ex. 21 CD
Elongation (%)	650	668	631	723
Young's modulus (psi)	18,990	19,997	23,086	23,524
PPT* tear (gms)	5.9	6.8	6.4	6.5

*Puncture Propagation Tear

MD = machine direction

CD = cross direction

Table 9

Property	Example 20	Comparative example 21
Dart A (grams)	472	454
Puncture (grams)	235	275
Clarity (percent)	71	68
Haze	3.1	6.4
20° gloss	114	81
Block (grams)	148	134

[0156] During the blown film fabrication, it is noticed that at the same screw speed (25 rpm) and at the same temperature profile, the extruder back pressure is about 3500 psi at about 58 amps power consumption for comparative example 21 and about 2550 psi at about 48 amps power consumption for example 20, thus showing the novel polymer of example 20 to have improved processability over that of a conventional heterogeneous Ziegler polymerized polymer. The throughput is also higher for Example 20 than for comparative example 21 at the same screw speed. Thus, example 20 has higher pumping efficiency than comparative example 21 (i.e., more polymer goes through per turn of the screw).

[0157] As Figure 5 shows, the heat seal properties of polymers of the present invention are improved, as evidenced by lower heat seal initiation temperatures and higher heat seal strengths at a given temperature, as compared with conventional heterogeneous polymers at about the same melt index and density.

Examples 24 and 25

[0158] The polymer products of Examples 1 and 3 are produced in a continuous solution polymerization process using a continuously stirred reactor, as described in copending U.S. application serial number 07/776,130, filed October 15, 1991. The metal complex $[C_5Me_4(SiMe_2N^iBu)]TiMe_2$ is prepared as described in copending U.S. application serial number 07/776,130 and the cocatalysts used are tris(pentafluorophenyl) borane (B:Ti ratio of 2:1) and MMAO (Al:Ti ratio of 4:1). For Example 24 the ethylene concentration in the reactor is about 1.10 percent and for Example 25 the ethylene concentration in the reactor is about 1.02 percent (percentages based on the weight of the reactor contents). For each Example, the reactor is run without hydrogen.

[0159] Additives (e.g., antioxidants, pigments, etc.) can be incorporated into the interpolymer products either during the pelletization step or after manufacture, with a subsequent re-extrusion. Examples 24 and 25 are each stabilized with 1250 ppm Calcium Stearate, 200 ppm Irganox 1010, and 1600 ppm Irgafos 168. Irgafos™ 168 is a phosphite stabilizer and Irganox™ 1010 is a hindered polyphenol stabilizer (e.g., tetrakis [methylene 3-(3,5-ditert.butyl-4-hydroxyphenyl)propionate])methane. Both are trademarks of and made by Ciba-Geigy Corporation.

Example 24 and Comparative Example 26

[0160] Example 24 is an ethylene/1-octene elastic substantially linear olefin polymer produced as described herein.

[0161] Comparative Example 26 is an ethylene/1-butene copolymer trademarked Exact® made by Exxon Chemical containing butylated hydroxy toluene (BHT) and Irganox® 1076 as polymeric stabilizers. Table 10 summarizes physical properties and rheological performance of example 24 and comparative example 26:

Table 10

Property	Example 24	Comparative Example 26
I_2 (g/10 minutes)	3.3	3.58
Density (g/cm ³)	0.870	0.878
I_{10}/I_2	7.61	5.8
M_w/M_n	1.97	1.95
PI (kPoise)	3.2	8.4
Elastic Modulus @ 0.1 rad/sec (dynes/cm ²)	87.7	8.3
OSMF*, critical shear rate (sec ⁻¹)	660	250

*Onset of surface melt fracture

[0162] Even though Example 24 and Comparative Example 26 have very similar molecular weight distributions (M_w/M_n), I_2 and density, Example 24 has a much lower processing index (PI) (38 percent of the PI of Comparative Example 26), a much higher onset of surface melt fracture (264 percent increase in OSMF) and an elastic modulus an order of magnitude higher than Comparative Example 26, demonstrating that Example 24 has much better processability and higher melt elasticity than Comparative Example 26.

[0163] Elastic modulus is indicative of a polymer's melt stability, e.g., more stable bubbles when making blown film and less neck-in. Resultant physical properties of the finished film are also higher.

[0164] Onset of surface melt fracture is easily identified by visually observing the surface extrudate and noting when the extrudate starts losing gloss and small surface roughness is detected by using 40X magnification.

[0165] Dynamic shear viscosity of the polymers is also used to show differences between the polymers and measures viscosity change versus shear rate. A Rheometrics Mechanical Spectrometer (Model RMS 800) is used to measure viscosity as a function of shear rate. The RMS 800 is used at 190°C at 15 percent strain and a frequency sweep (i.e., from 0.1-100 rad/sec) under a nitrogen purge. The parallel plates are positioned such that they have a gap of about 1.5-2 mm. Data for Example 24 and Comparative Example 26 are listed in Table 11 and graphically displayed in Figure 6.

Table 11

Shear Rate (rad/sec)	Dynamic Viscosity (poise) for Example 24	Dynamic Viscosity (poise) for Comparative Example 26
0.1	28290	18990
0.1585	28070	18870
0.2512	27630	18950
0.3981	27140	18870
0.631	26450	18840
1	25560	18800
1.585	24440	18690
2.512	23140	18540
3.981	21700	18310
6.31	20170	17960
10	18530	17440
15.85	16790	16660
25.12	14960	15620
39.81	13070	14310
63.1	11180	12750
100	9280	10960

[0166] Surprisingly, Example 24 shows a shear thinning behaviour, even though Example 24 has a narrow molecular weight distribution. In contrast, Comparative Example 26 shows the expected behaviour of a narrow molecular weight distribution polymer, with a flatter viscosity/shear rate curve.

[0167] Thus, elastic substantially linear olefin polymers made in accordance with the present invention (e.g. Example 24) have lower melt viscosity than a typical narrow molecular weight distribution linear copolymer made by single site catalyst technology at the melt processing shear rate region of commercial interest. In addition, the novel elastic substantially linear olefin polymers have a higher low shear/zero shear viscosity than the Comparative linear polymer, thus demonstrating that the copolymers of the invention have higher "green strength" which is useful for forming and maintaining blended compositions such as those used in the wire and cable coating industry, where the compounded materials must maintain their integrity at low or zero shear without segregating the components.

Example 25 and Comparative Example 27

[0168] Example 25 is an ethylene/1-octene elastic substantially linear olefin polymer produced in a continuous solution polymerization process as described herein.

[0169] Comparative Example 27 is an ethylene/propene copolymer made by Mitsui PetroChemical Corporation and trademarked Talmer® P-0480. Table 12 summarizes physical properties and rheological performance of these two polymers:

Table 12

Property	Example 25	Comparative Example 27
I_2 (g/10 minutes)	1.01	1.1
Density (g/cm ³)	0.870	0.870
I_{10}/I_2	7.62	6.06
M_w/M_n	1.98	1.90
PI (kPoise)	7.9	27.4
Elastic Modulus @ 0.1 rad/sec (dynes/cm ²)	964	567.7
OSMF*, critical shear rate (sec ⁻¹)	781	105

*Onset of surface melt fracture

[0170] Even though Example 25 and Comparative Example 27 have similarly narrow molecular weight distributions (M_w/M_n), I_2 , and density, Example 25 has a PI which is 28 percent of that of Comparative Example 27, a 743 percent increase in onset of surface melt fracture and a higher elastic modulus than Comparative Example 27, demonstrating that Example 24 has much better processability than Comparative Example 27. Onset of surface melt fracture is easily identified by visually observing the surface extrudate and noting when the extrudate starts losing gloss and small surface roughness is detected by using 40X magnification.

Examples 28-37

[0171] Examples 28-35 are ethylene/propene copolymers made using the constrained geometry catalyst described herein and in a continuous solution polymerization process. Examples 36 and 37 are ethylene/1-butene copolymers made using the constrained geometry catalyst described herein and in a continuous solution polymerization process. Examples 28-35 each contained approximately 1250 ppm calcium stearate and 200 ppm Irganox 1010. Table 13 and 13A describe the polymerization conditions and Table 14 describes the resultant polymer physical properties for Examples 28-35:

Table 13

Ex	Reactor ethylene conc. (wt %)	Estimated reactor PE conc. (wt %)	Ethylene flow rate (lbs/hr)	hydrogen/ethylene ratio (mole percent)
28	5.3	6.0	3.19	0.048
29	4.2	7.3	3.19	0.024
30	4.0	8.9	3.19	0.028

Table 13 (continued)

Ex	Reactor ethylene conc. (wt %)	Estimated reactor PE conc. (wt %)	Ethylene flow rate (lbs/hr)	hydrogen/ethylene ratio (mole percent)
31	3.5	9.3	3.18	0.024
32	2.5	10.6	3.20	0.027
33	2.6	10.7	3.18	0.007
34	1.3	10.5	3.19	0.027
35	1.0	10.9	3.19	0.010

Table 13A

Ex	Reactor temp (°C)	Diluent/ethylene ratio	Comonomer/olefin ratio
28	170	8.2	25.5
29	172	8.1	24.0
30	171	7.1	16.6
31	171	7.2	20.1
32	170	7.1	15.6
33	173	7.1	16.7
34	145	8.2	17.8
35	158	8.2	18.8

Table 14

Ex.	I_2 (gms/10 minutes)	I_{10}/I_2	Density (gm/cm ³)	M_w/M_n
28	1.08	7.8	0.9176	2.00
29	1.02	8.8	0.9173	2.17
30	0.82	9.2	0.9175	2.08
31	0.79	9.4	0.9196	2.04
32	1.01	10.6	0.9217	2.09
33	0.83	12.4	0.9174	2.31
34	0.54	15.2	0.9201	2.12
35	0.62	15.6	0.9185	2.32

[0172] Figure 7 graphically displays a best fit line drawn through a plot of the I_{10}/I_2 ratio for the ethylene/propene substantially linear polymers of examples 28-35 as a function of ethylene concentration in the polymerization reactor.

[0173] Surprisingly, in contrast to conventional Ziegler polymerized polymers and in contrast to a batch polymerization using the same catalyst and relatively high ethylene concentrations, as the ethylene concentration in the reactor decreases using a continuous polymerization process, the I_{10}/I_2 ratio (indicating the amount of long chain branching in the novel substantially linear polymers) increases, even though the molecular weight distribution, M_w/M_n , remains very narrow and essentially constant at about 2.

[0174] Table 15 shows the critical shear stress and critical shear rate at OGMF and OSMF for examples 28-35:

Table 15

Example	OSMF	OGMF
28 (shear stress)	2.15×10^6 dynes/cm ²	4.09×10^6 dynes/cm ²

Table 15 (continued)

Example	OSMF	OGMF
28 (shear rate)	129.8 sec ⁻¹	668.34 sec ⁻¹
29 (shear stress)	1.94 x 10 ⁶ dynes/cm ²	4.3 x 10 ⁶ dynes/cm ²
29 (shear rate)	118.8 sec ⁻¹	652.1 sec ⁻¹
30 (shear stress)	1.08 x 10 ⁶ dynes/cm ²	4.3 x 10 ⁶ dynes/cm ²
30 (shear rate)	86.12 sec ⁻¹	650.7 sec ⁻¹
31 (shear stress)	1.08 x 10 ⁶ dynes/cm ²	>4.3 x 10 ⁶ dynes/cm ²
31 (shear rate)	90.45 sec ⁻¹	>683 sec ⁻¹
32 (shear stress)	1.94 x 10 ⁶ dynes/cm ²	3.66 x 10 ⁶ dynes/cm ²
32 (shear rate)	178.2 sec ⁻¹	673 sec ⁻¹
33 (shear stress)	2.15 x 10 ⁶ dynes/cm ²	about 3.23 x 10 ⁶ dynes/cm ²
33 (shear rate)	235.7 sec ⁻¹	about 591 sec ⁻¹
34 (shear stress)	1.94 x 10 ⁶ dynes/cm ²	3.44 x 10 ⁶ dynes/cm ²
34 (shear rate)	204.13 sec ⁻¹	725.23 sec ⁻¹
35 (shear stress)	1.94 x 10 ⁶ dynes/cm ²	about 3.26 x 10 ⁶ dynes/cm ²
35 (shear rate)	274.46 sec ⁻¹	637.7 sec ⁻¹

[0175] Table 16 and 16A describe the polymerization conditions and Table 17 describes the resultant polymer physical properties for ethylene/1-butene copolymer Examples 36 and 37:

Table 16

Ex	Reactor ethylene conc. (wt %)	Reactor PE conc (wt %)	Ethylene flow rate (lbs/hr)	Hydrogen/ethylene ratio (mole percent)
36	5.3	5.8	3.20	0.035
37	1.3	10.8	3.19	0.010

Table 16A

Ex	Reactor temp (°C)	Diluent/ethylene ratio	Comonomer/olefin ratio
36	170	8.1	24.2
37	152	8.2	17.1

Table 17

Ex.	I ₂ (gms/10 minutes)	I ₁₀ /I ₂	Density (gm/cm ³)	M _w /M _n
36	0.59	7.5	0.9201	2.06
37	1.03	11.4	0.9146	2.22

[0176] The data in Tables 16, 16A and 17 show that as the ethylene concentration in the reactor decreases while using the constrained geometry catalyst as described herein, the I₁₀/I₂ ratio of the novel substantially linear polymers increases, indicating the amount of long chain branching in the novel polymers, even while the molecular weight distribution, M_w/M_n, of the novel polymers remains narrow at essentially about 2.

[0177] Table 18 shows the critical shear stress and critical shear rate at OGMF and OSMF for examples 36 and 37:

Table 18

Example	OGMF	OSMF
36 (shear stress)	1.94×10^6 dynes/cm ²	4.09×10^6 dynes/cm ²
36 (shear rate)	52.3 sec ⁻¹	234.45 sec ⁻¹
37 (shear stress)	1.08×10^6 dynes/cm ²	3.01×10^6 dynes/cm ²
37 (shear rate)	160.5 sec ⁻¹	493.9 sec ⁻¹

Claims

1. Ethylene homo- or interpolmer, comprised of ethylene and optionally one C₃-C₂₀ α -olefins characterized in that the polymer has 0.01 to 3 long chain branches per 1000 carbons.
2. Ethylene homo- or interpolmer according to claim 1 having 0.01 to 1 long chain branches per 1000 carbons.
3. Ethylene homo- or interpolmer according to claim 1 or 2, having 0.05 to 1 long chain branches per 1000 carbons.
4. Ethylene homo- or interpolmer according to any one of the preceding claims having a molecular weight distribution, M_w/M_n , and a melt flow ratio, I_{10}/I_2 , defined by the equation: $M_w/M_n \leq I_{10}/I_2 - 4.63$.
5. Ethylene homo- or interpolmer according to any one of the preceding claims having a molecular weight distribution, M_w/M_n , of less than 5.
6. Ethylene homo- or interpolmer according to any one of the preceding claims having a molecular weight distribution, M_w/M_n , of between 1.5 and 2.5.
7. Ethylene homo- or interpolmer according to any one of the preceding claims having a density of from 0.85 g/cm³ to 0.92 g/cm³.
8. Ethylene homo- or interpolymers according to any one of the preceding claims having a CDBI of greater than 50%.

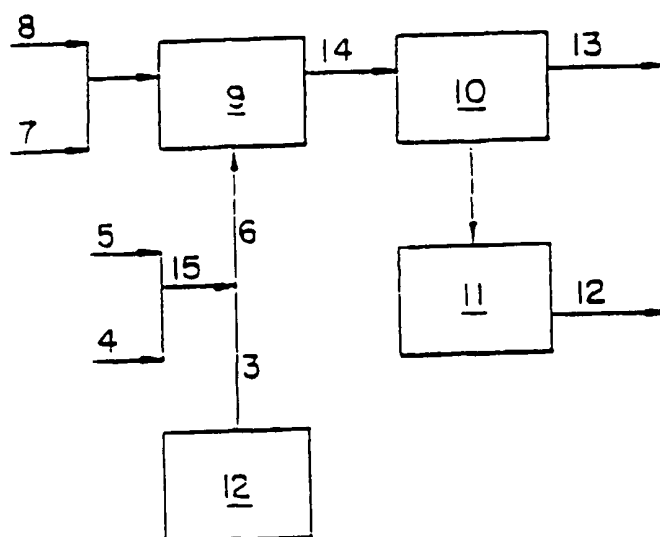


FIG.1

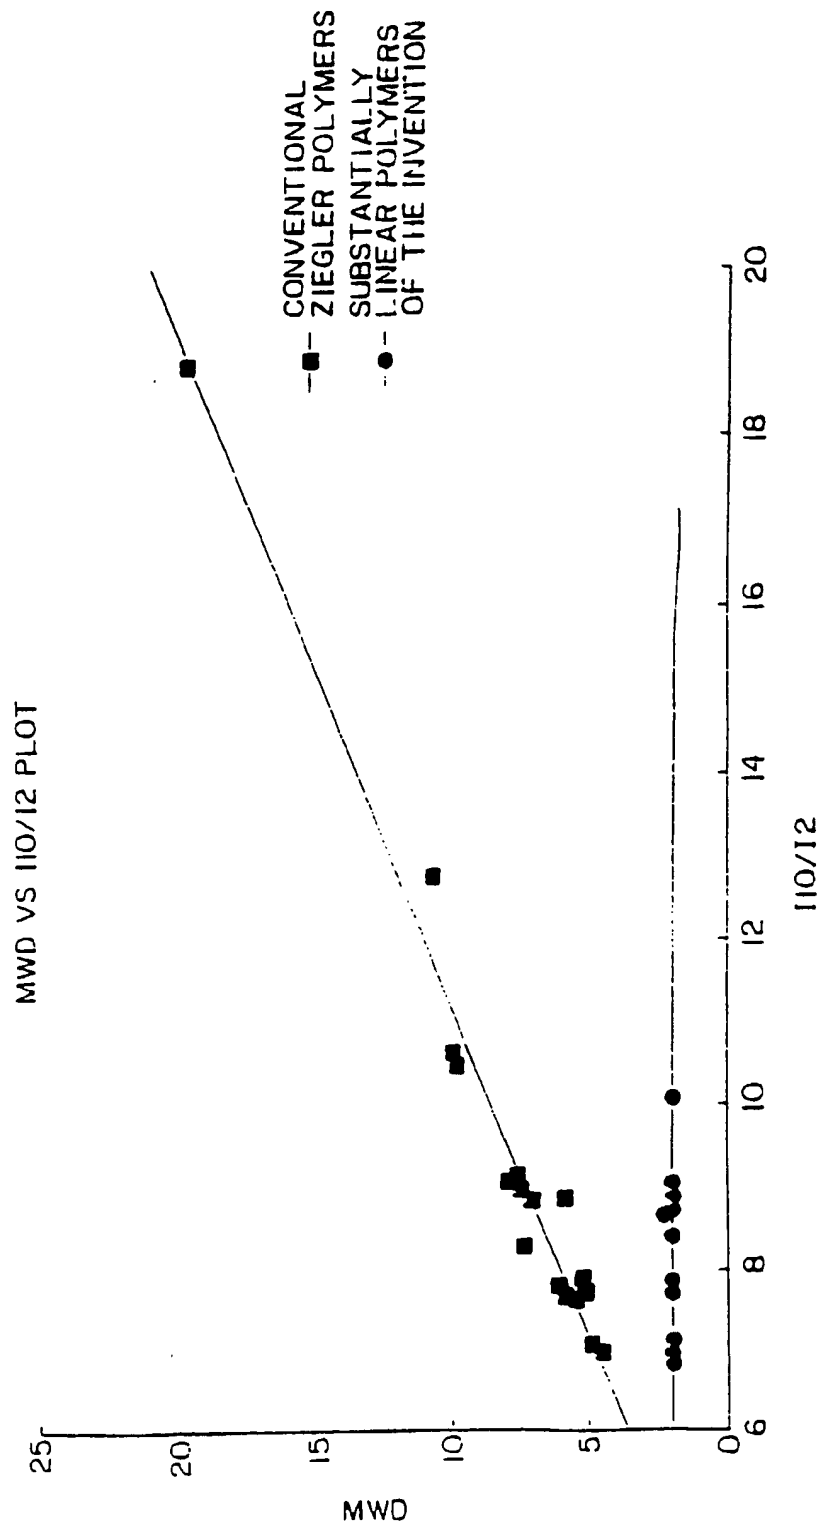


FIG. 2

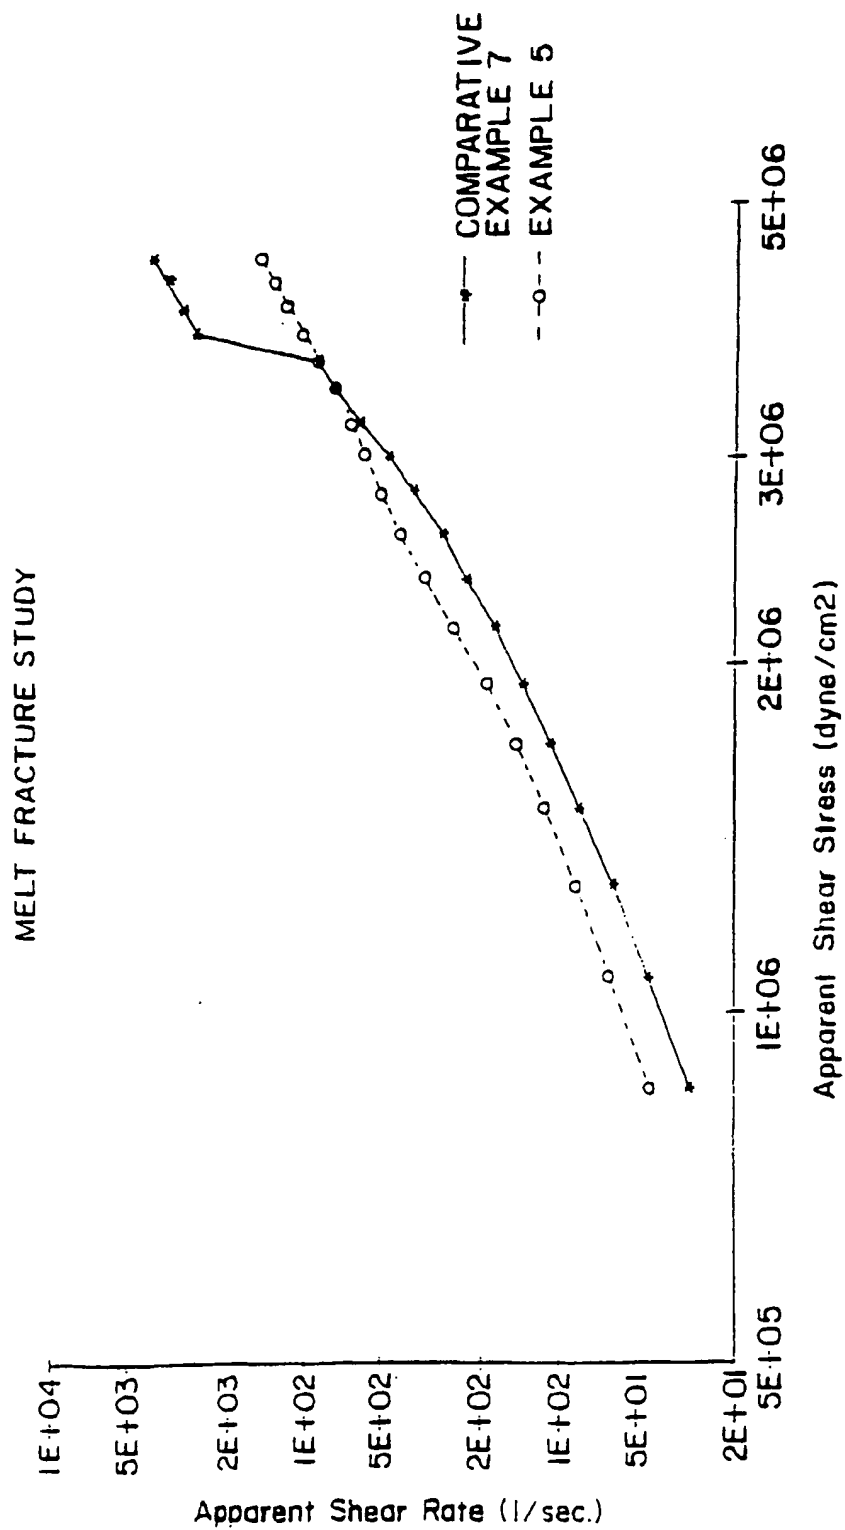


FIG.3

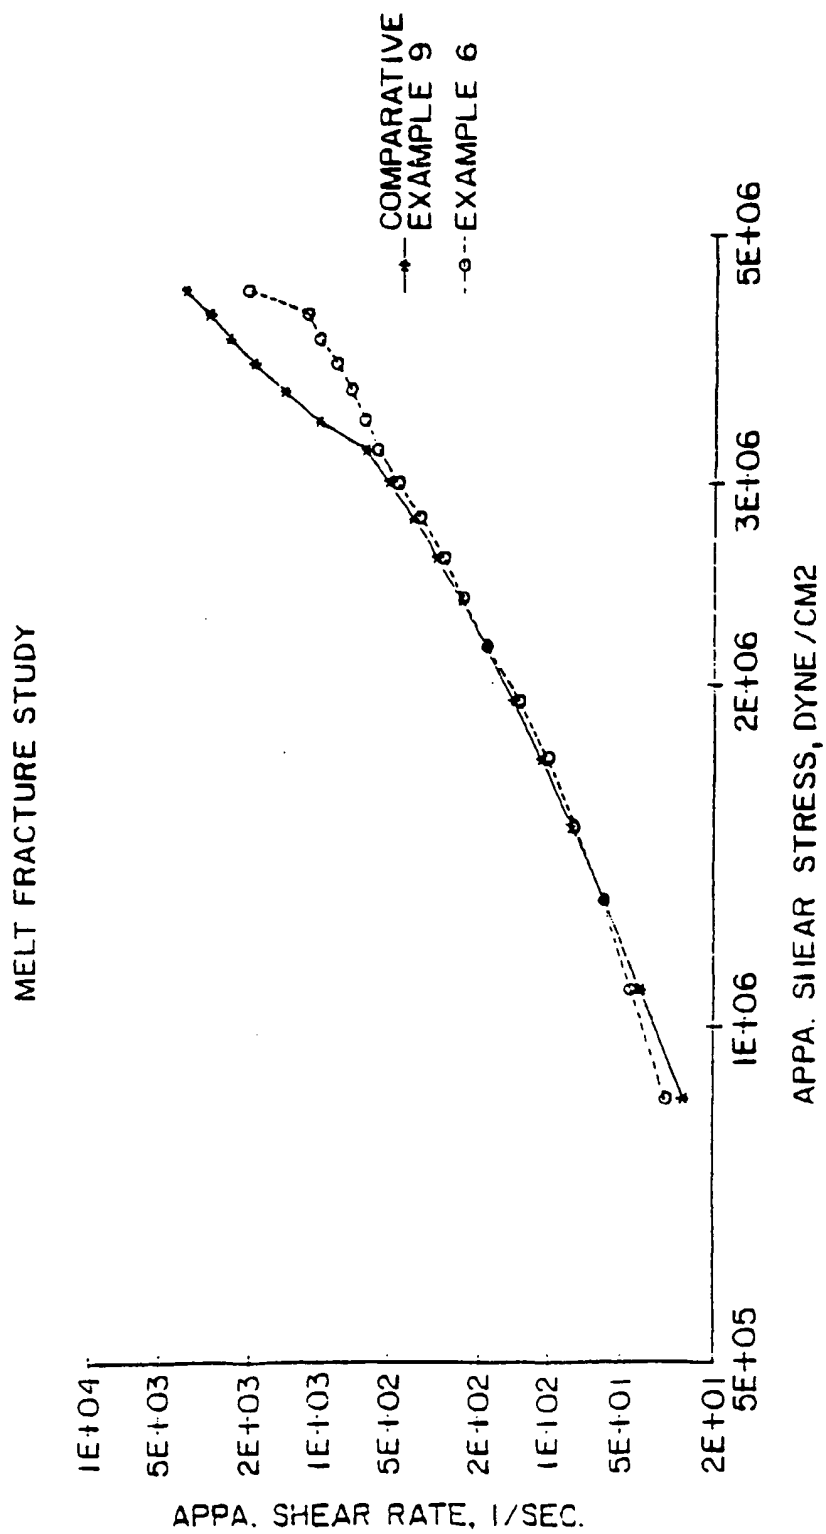


FIG.4

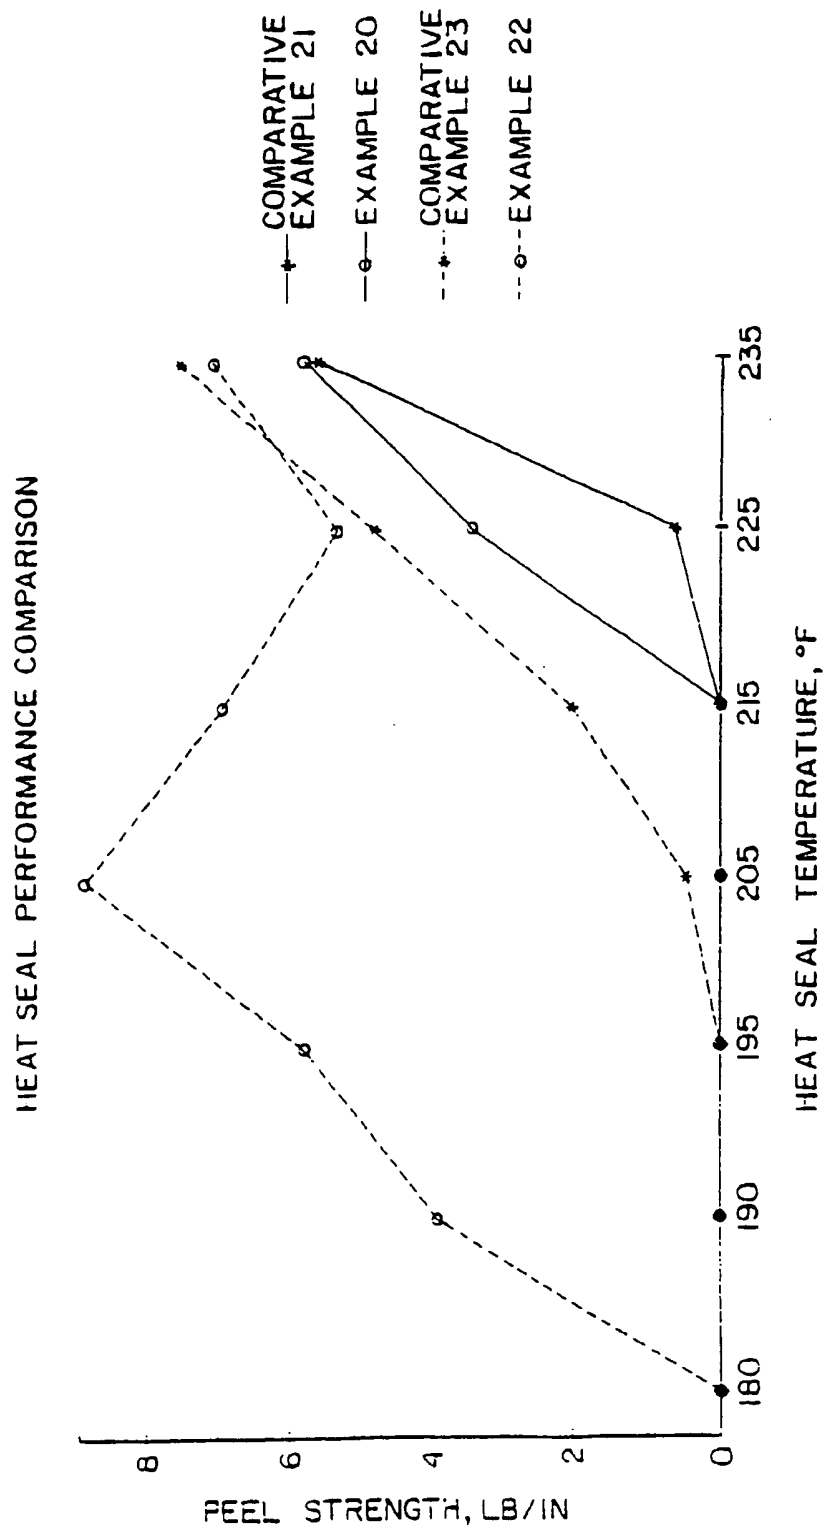


FIG.5

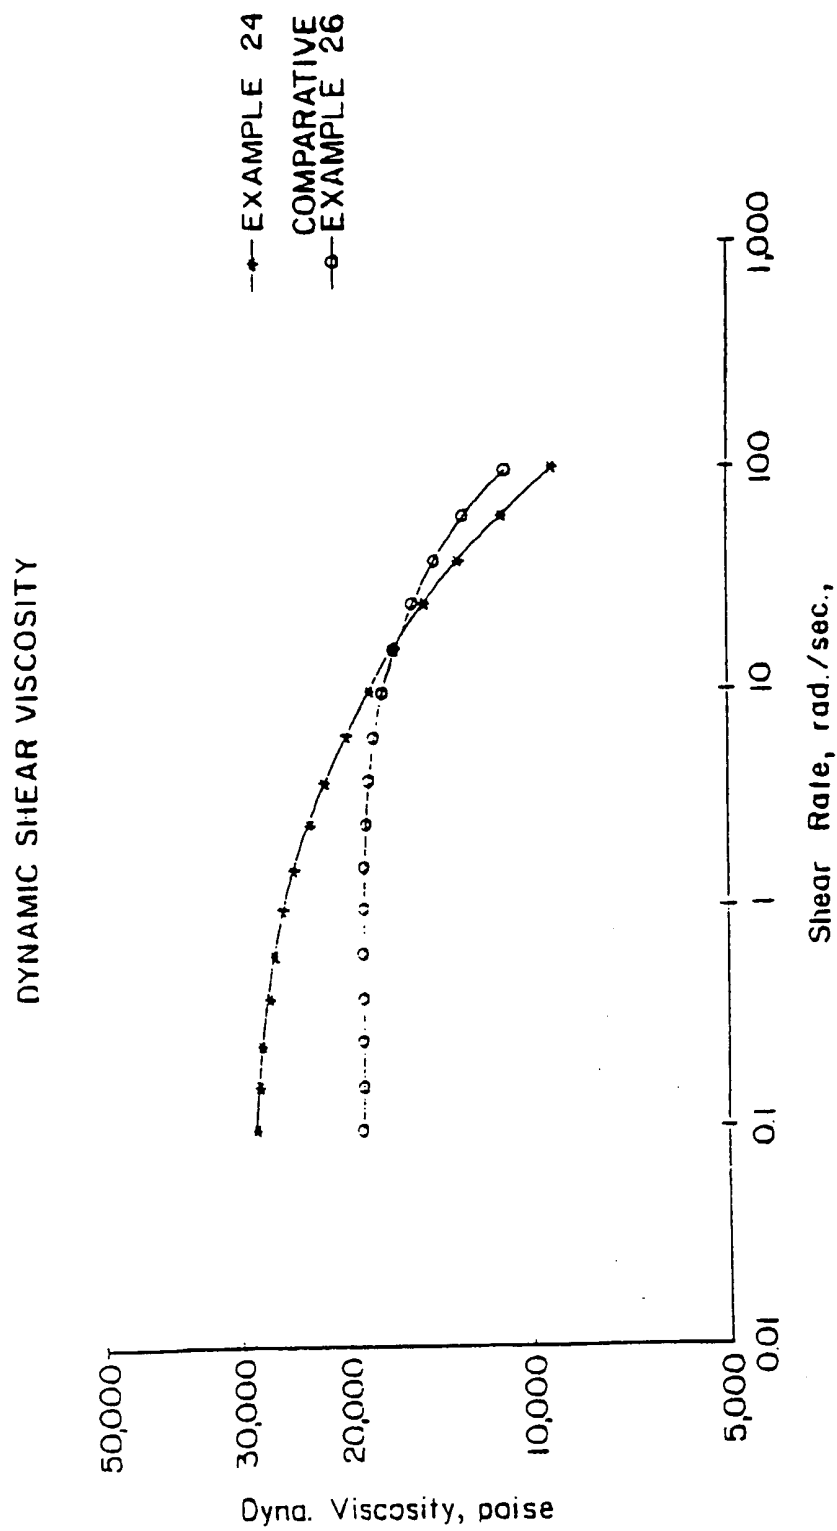


FIG. 6

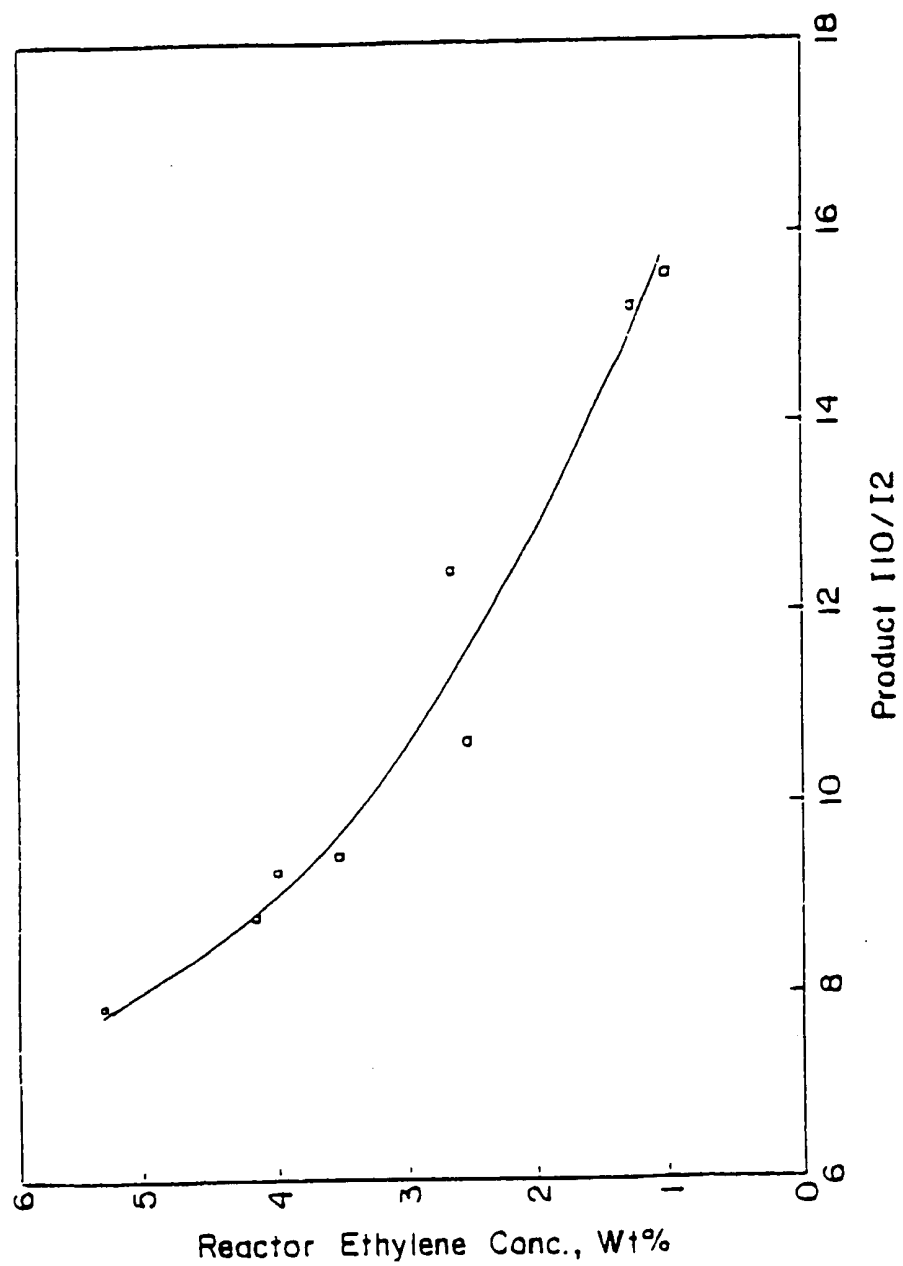


FIG.7